



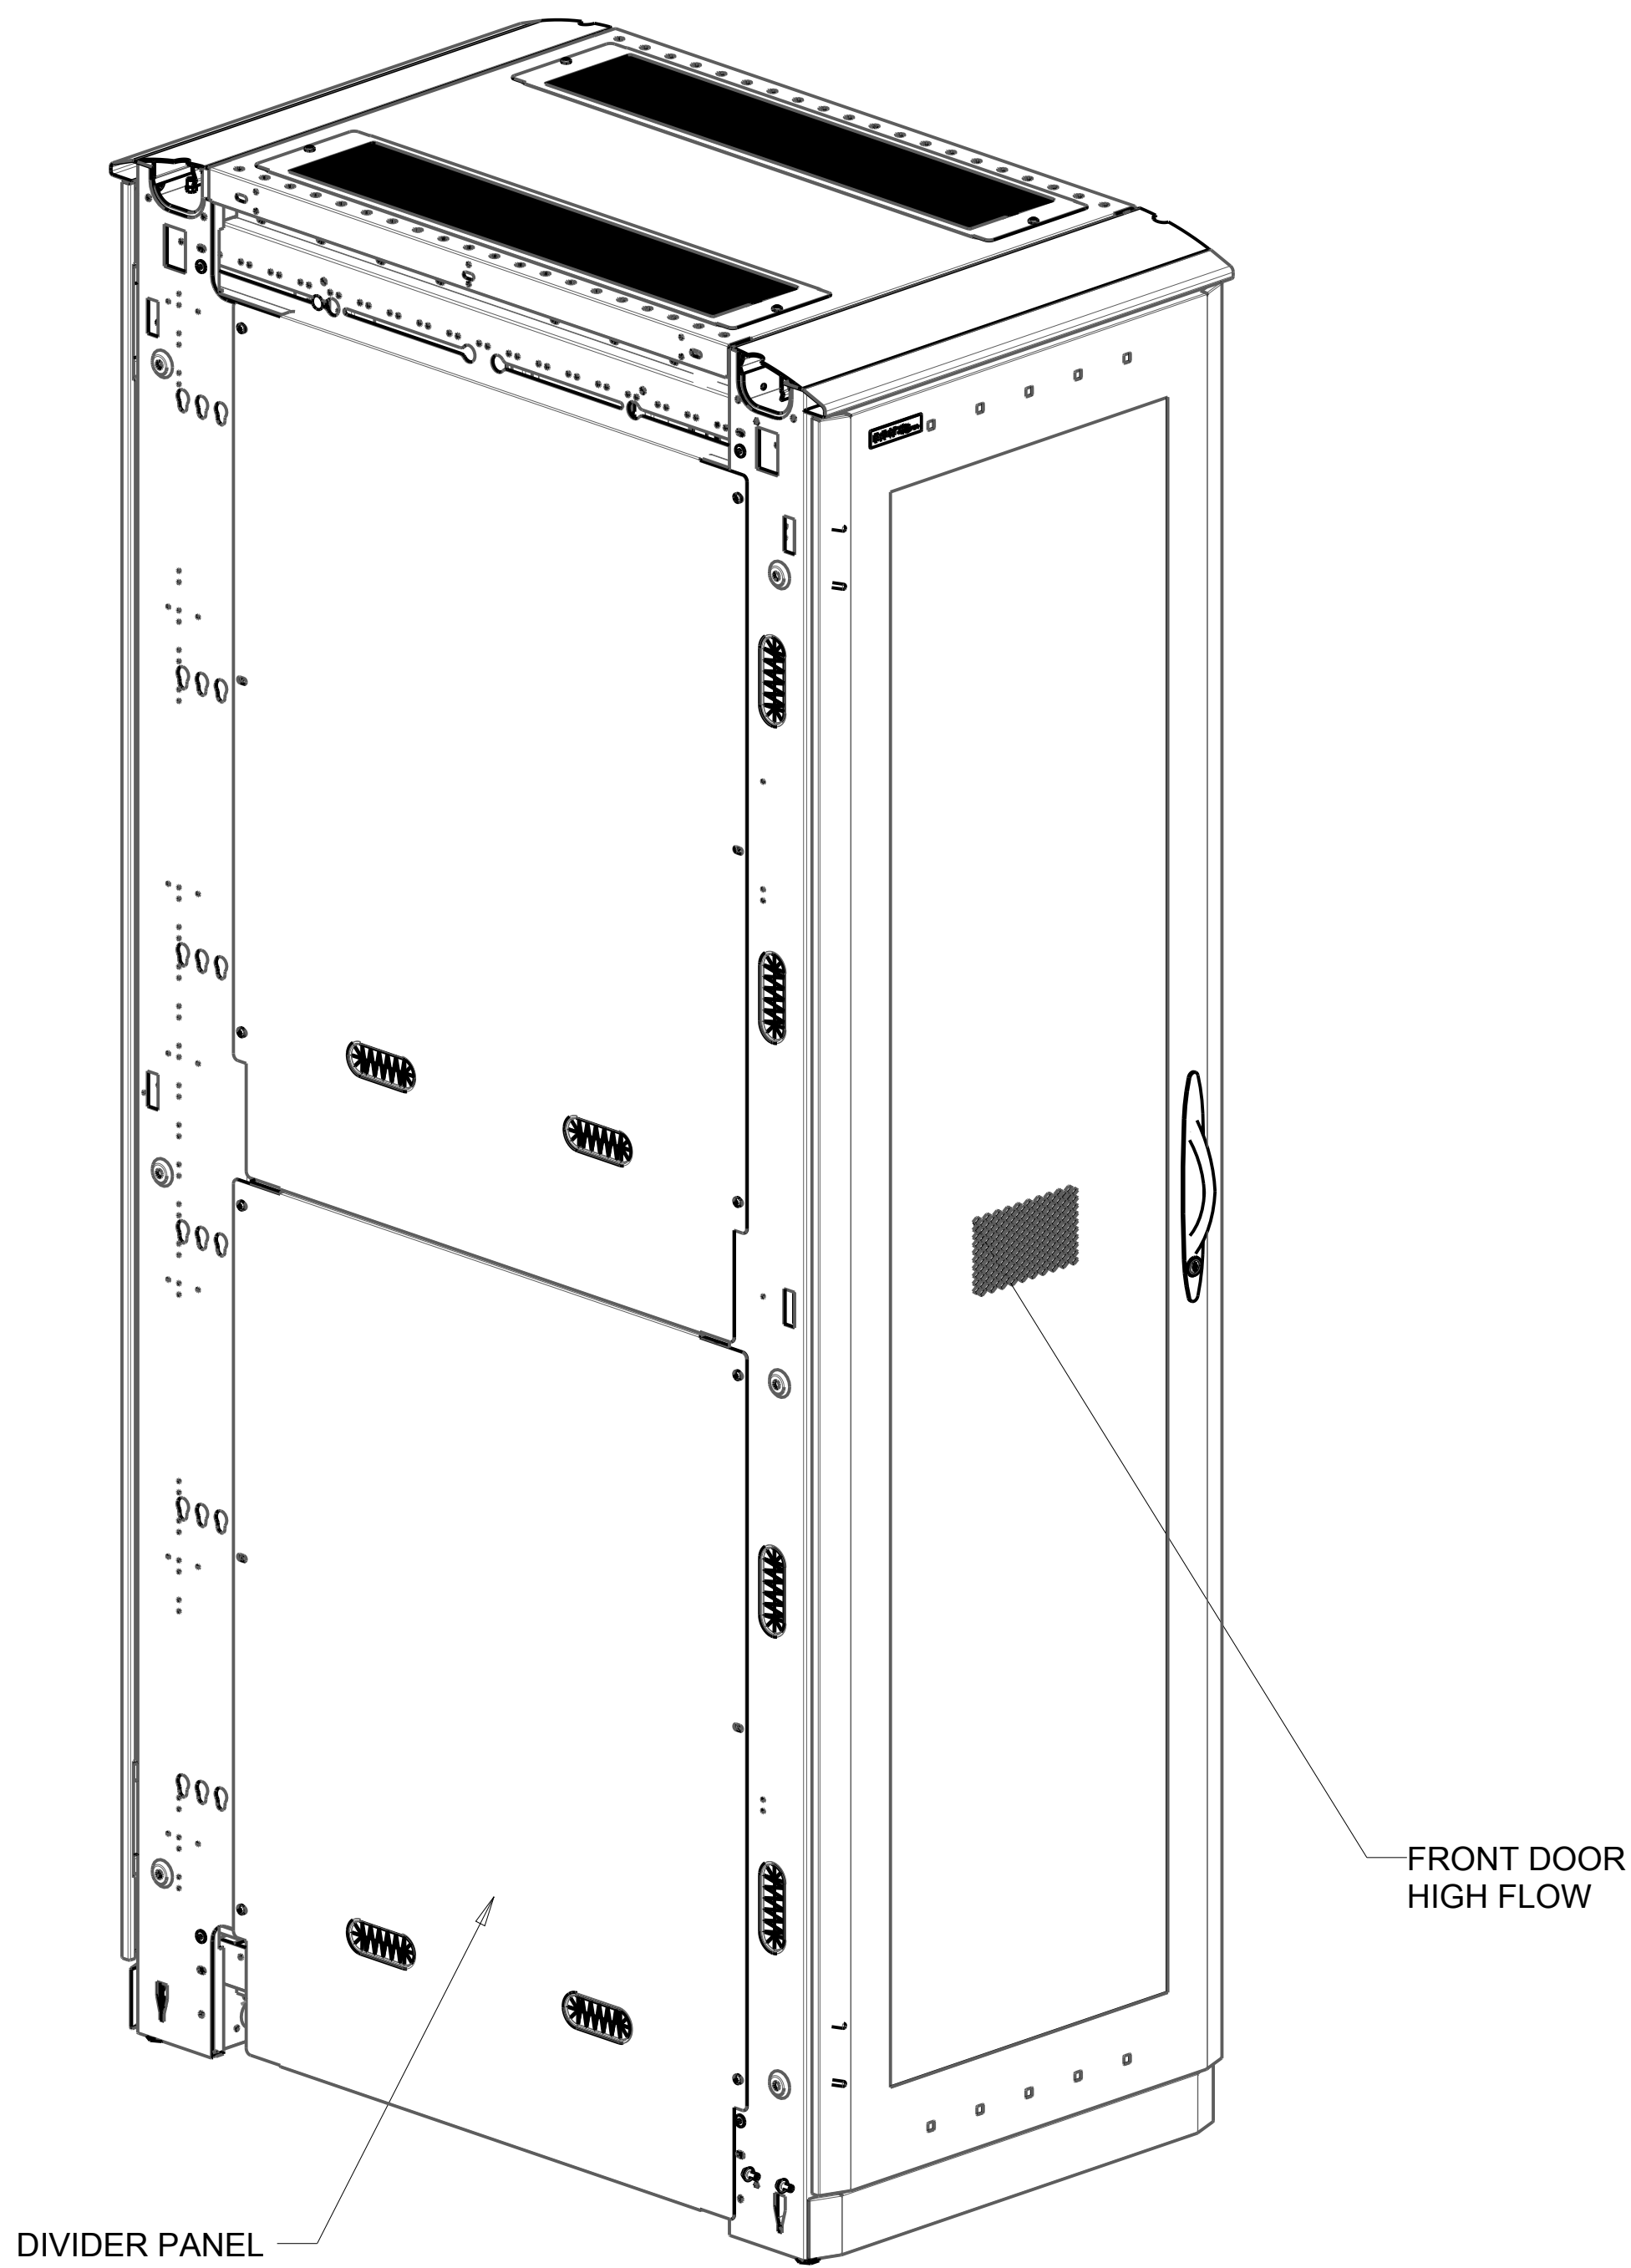

FRONT ISO

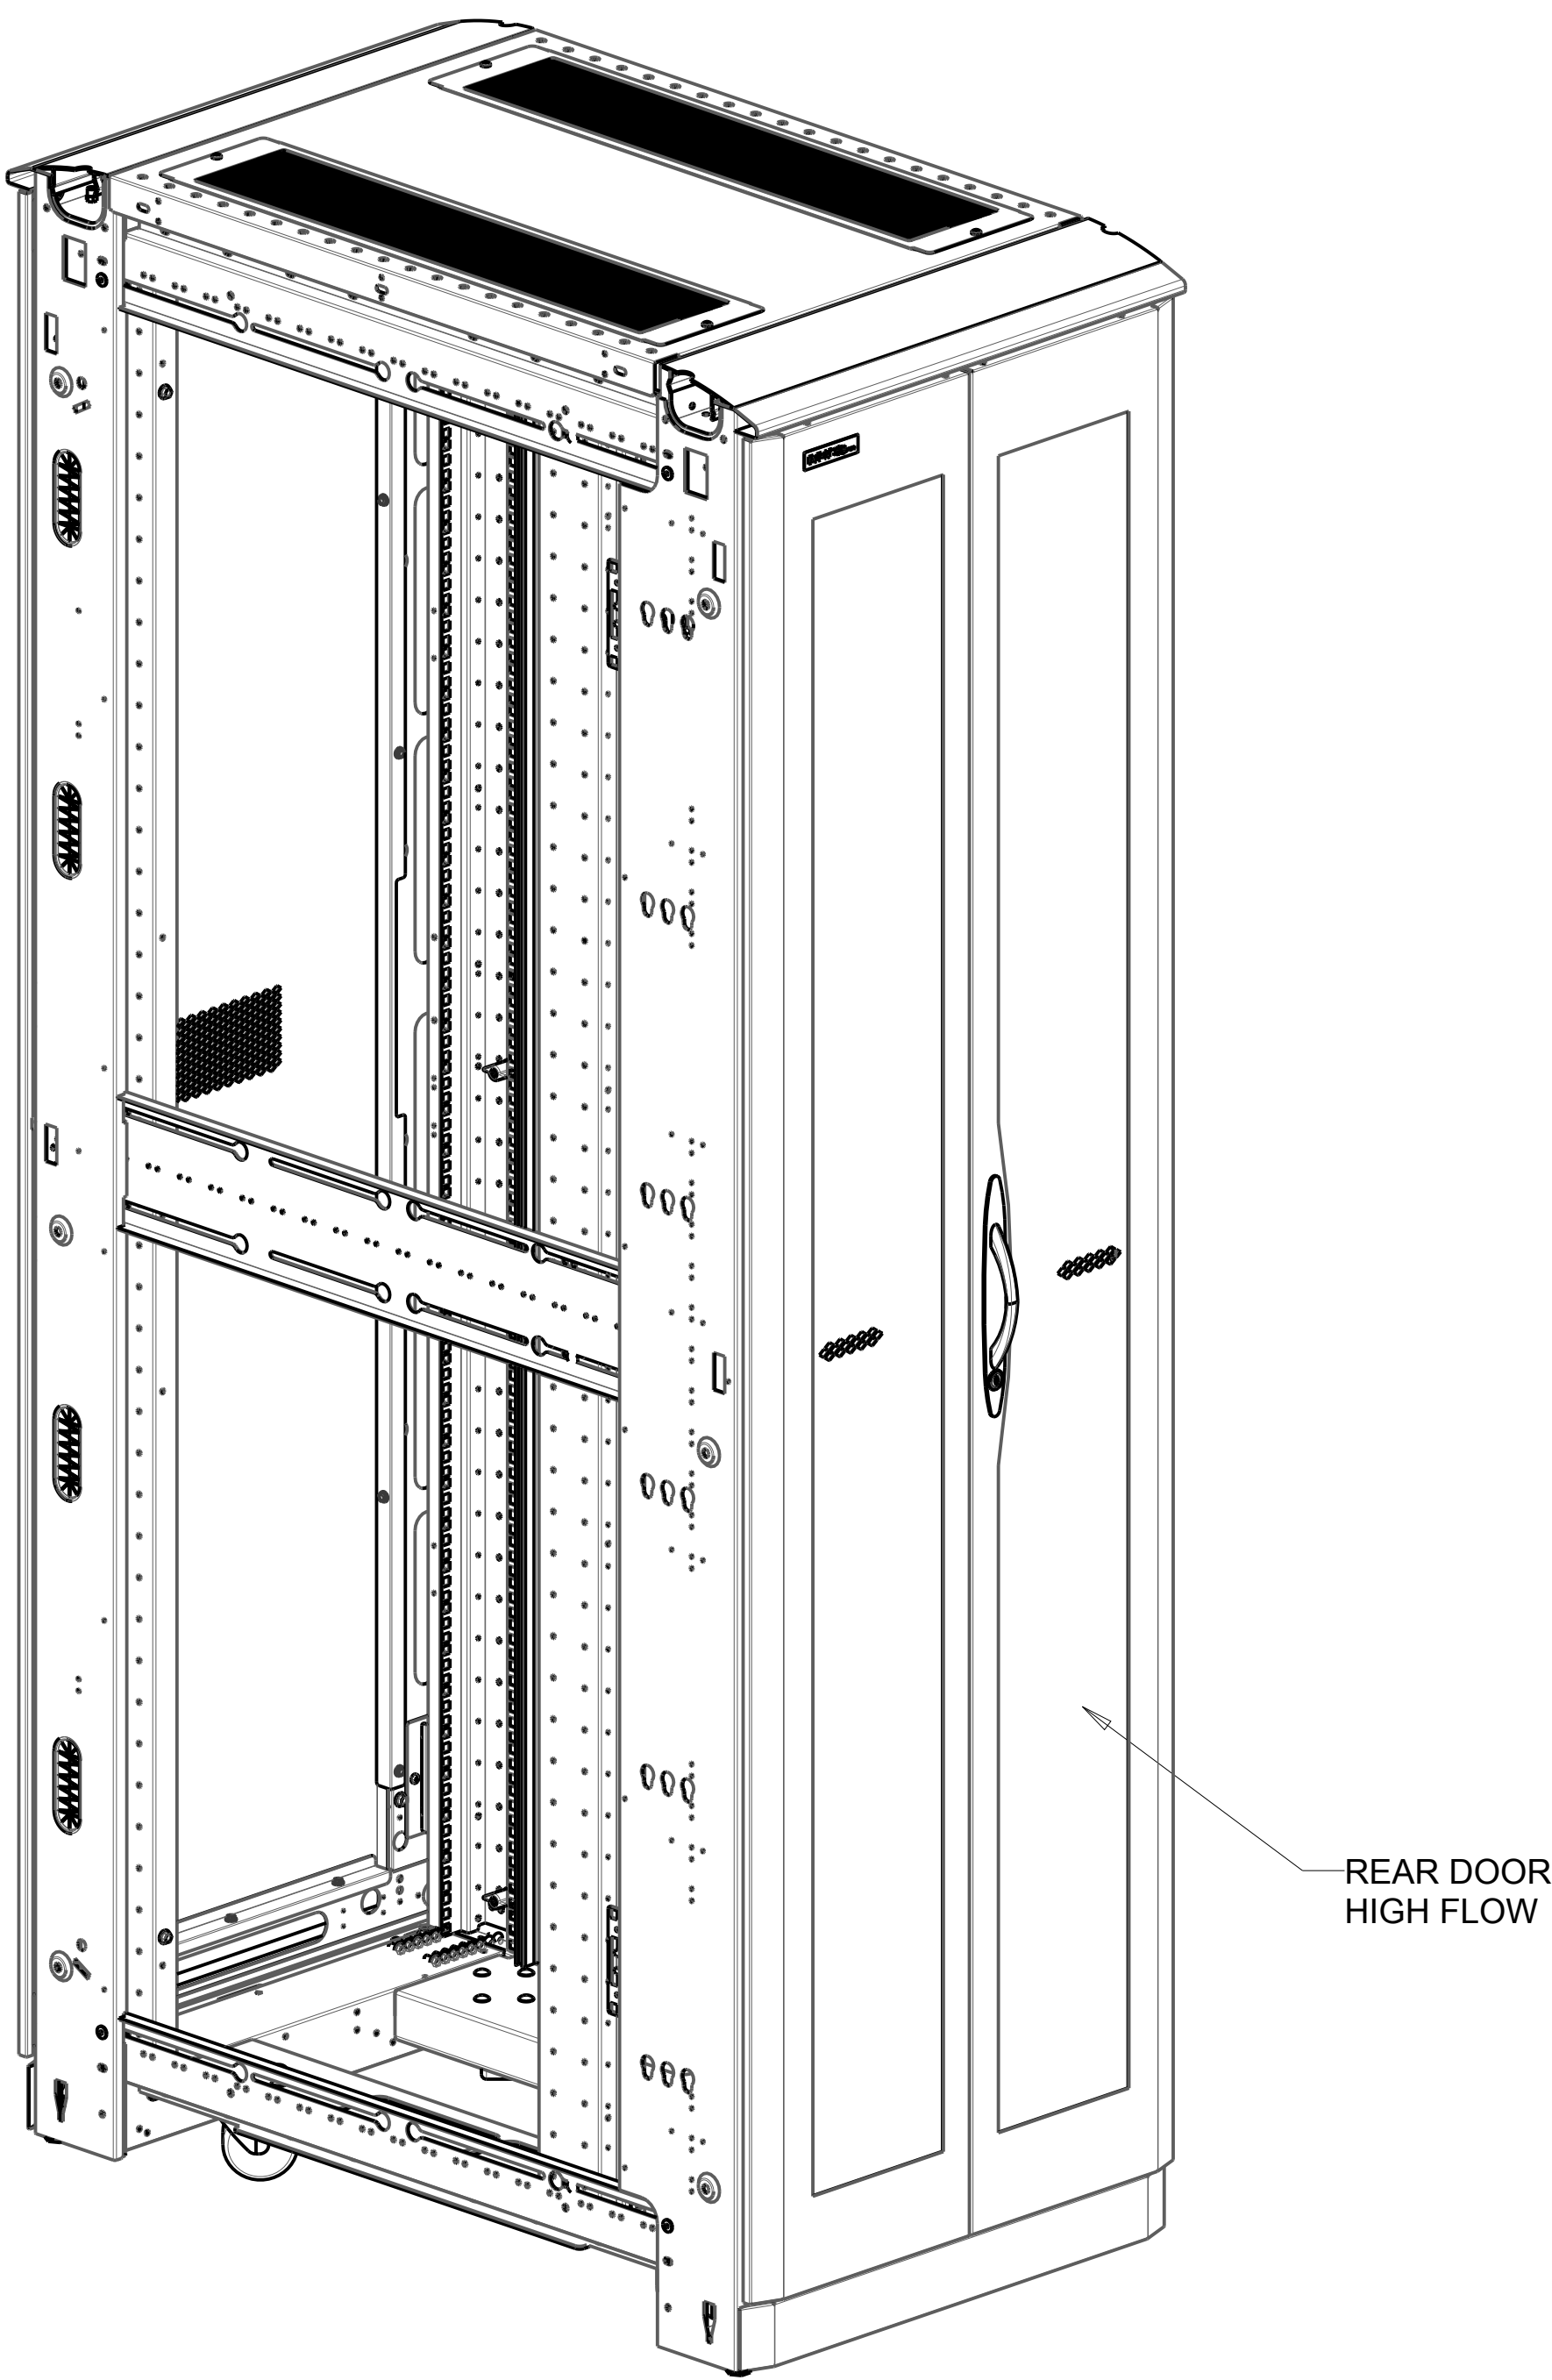


REAR ISO

SHIPPING WEIGHT: 340 LBS

A	03/04/15	RArora	REPLACE PDUBRCKTW WITH PDUBRCKTWPMT (WIDER PDU BRACKET)	ECO-077724
REV	REV. DATE	REV'D BY	CURRENT REVISION DESCRIPTION	ECN OR EPR NUMBER

THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND IS LOANED SUBJECT TO RETURN UPON DEMAND AND UPON THE EXPRESS CONDITION THAT IT WILL NOT BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF EATON CORPORATION		CAGE NUMBER: 81824		ORIG EPR: EPR144344			
		DESIGN MGMT SITE: Worcester		DES. BY RArora	01/12/15		
		MATERIAL:		DRWN. BY RArora	01/12/15	CONFIG - 44U X 24W X 42D S-SERIES W/ RACK HYGIENE	
		MATERIAL FINISH: SPEC #		PROD GRP 50 - Paramount	COLOR: -		
DRAWN IN THIRD ANGLE PROJECTION		TOLERANCE UNLESS SPEC'D .XX ± .02 .XXX ± .005 ∠ ± .1 ALL DIMENSIONS IN INCHES		CRS GA: N/A	OTHER: -	SHEET: 1 OF 8	REV DATE: 03/04/15
						D ETN-ENC442442S	REV A

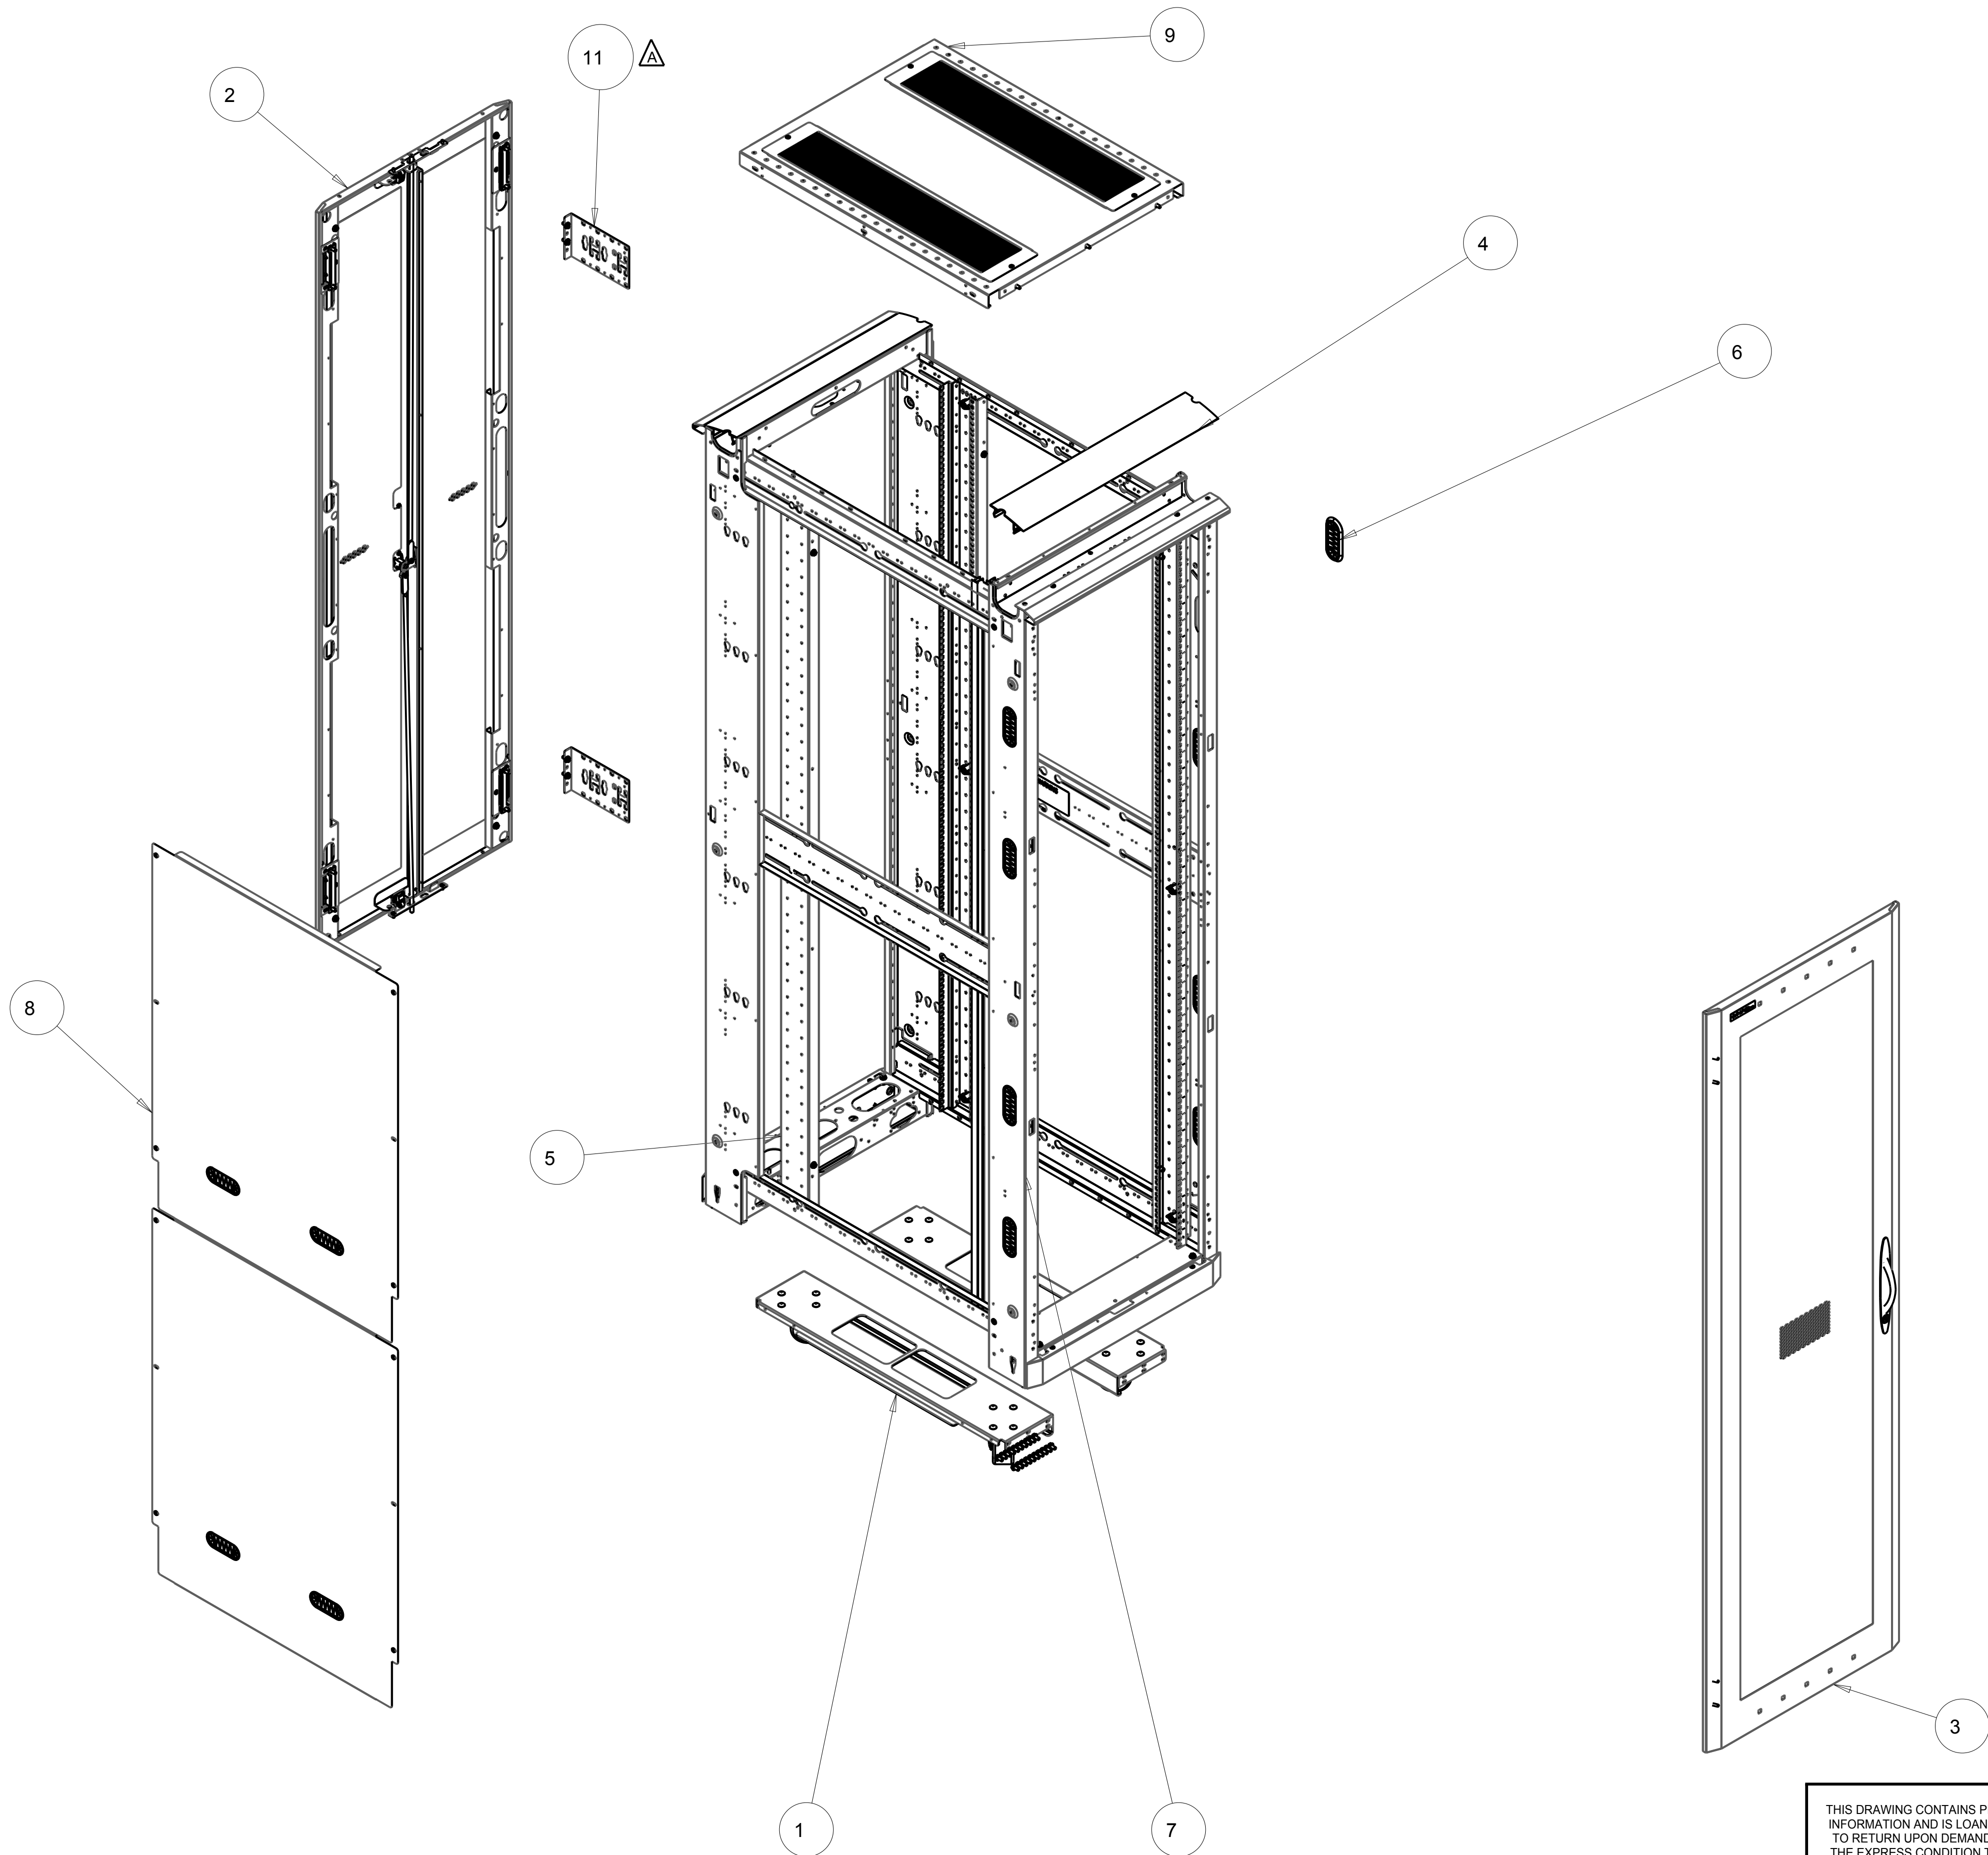


ASSEMBLY WIRING NOTE:

1. GROUND ALL DOORS, RAILS, TOP AND DIVIDER PANELS.
USE GROUNDING LANYARDS FROM KIT P/N GRNDPMT.
USE STANDARD W/L GROUND POINTS FOR ATTACHMENT AREAS.


11	SA	PDUBRCKTPMT	POWER STRIP BRACKET ASSY - PMT FRAME	1
10	SA	GRNDPMT	GROUND KIT - PARAMOUNT	1
9	MA	PMTNWTP2442	ASSEMBLY - TOP PANEL, 24W X 42D	1
8	MA	PMTJVD4442S	DIVIDER PANEL ASY - 44U X 42D	1
7	MA	PMTFRM442440	WLD - FRAME, 44U X 24W X 40D	1
6	MA	JWOVLGROM	GROMMET - OVAL 1.5WX4L	8
5	MA	JRM10000_	RACK MOUNT RAILS - 44U	1
4	MA	JFTK24_	FRAME TRIM KIT - 24"W	1
3	MA	JDHF8424L	DOOR, HIGH FLOW	1
2	MA	JDDHF8424	ASSEMBLY - SPLIT DOOR, HIGH FLOW	1
1	MA	JCSTR40	CASTER BRACKET ASSY, 40"	1
ITEM	TYPE	DOCUMENT #	DESCRIPTION	QTY

A	03/04/15	RArora	REPLACE PDUBRCKTW WITH PDUBRCKTWPMT (WIDER PDU BRACKET)	ECO-077724
REV	REV. DATE	REV'D BY	CURRENT REVISION DESCRIPTION	ECN OR EPR NUMBER


THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND IS LOANED SUBJECT TO RETURN UPON DEMAND AND UPON THE EXPRESS CONDITION THAT IT WILL NOT BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF EATON CORPORATION		CAGE NUMBER: 81824		ORIG EPR: EPR144344			
		DESIGN MGMT SITE: Worcester		DES. BY RArora	01/12/15		
		MATERIAL:		DRWN. BY RArora	01/12/15	CONFIG - 44U X 24W X 42D S-SERIES W/ RACK HYGIENE	
		MATERIAL FINISH:		PROD GRP 50 - Paramount			
DRAWN IN THIRD ANGLE PROJECTION		TOLERANCE UNLESS SPEC'D .XX ± .02 .XXX ± .005 ∠ ± .1		COLOR: -		SHEET: 2 OF 8	
ALL DIMENSIONS IN INCHES		SPEC # -		CRS GA: N/A		REV DATE: 03/04/15	
				OTHER: -		D ETN-ENC442442S REV A	

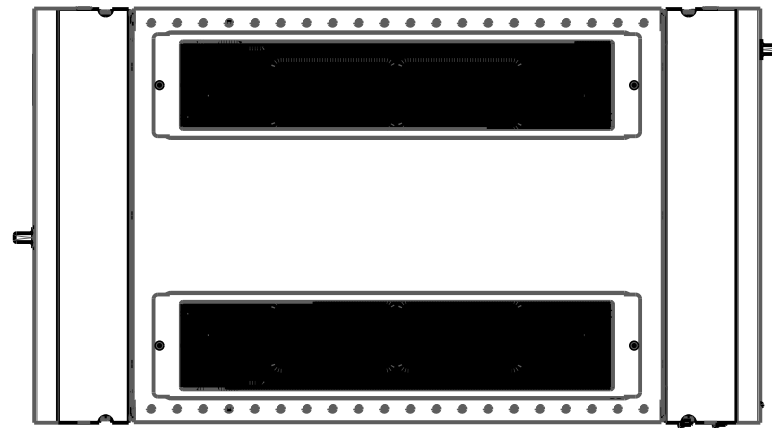

TOP

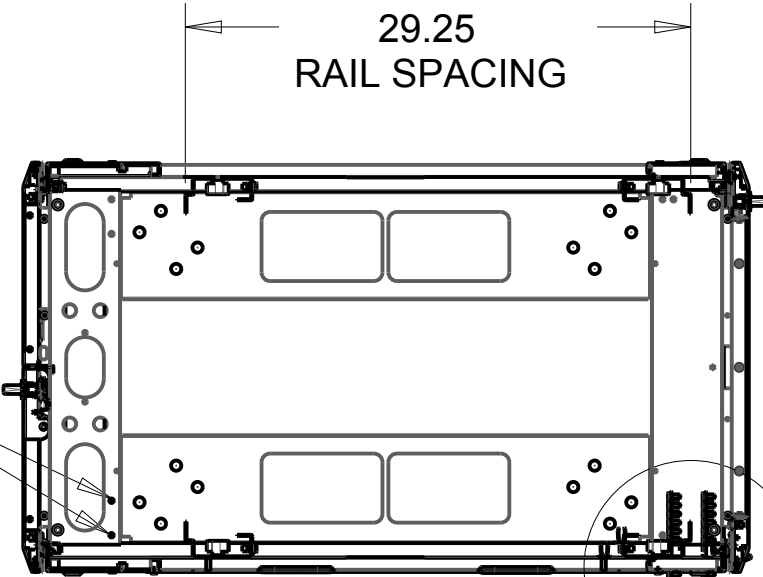


SECTION B-B

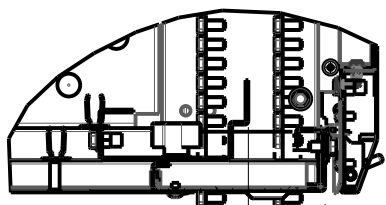


2.00 FROM FRONT
OF RAIL TO FRONT
OF CORNER POST

DETAIL D
SCALE 0.200


SEE DETAIL D

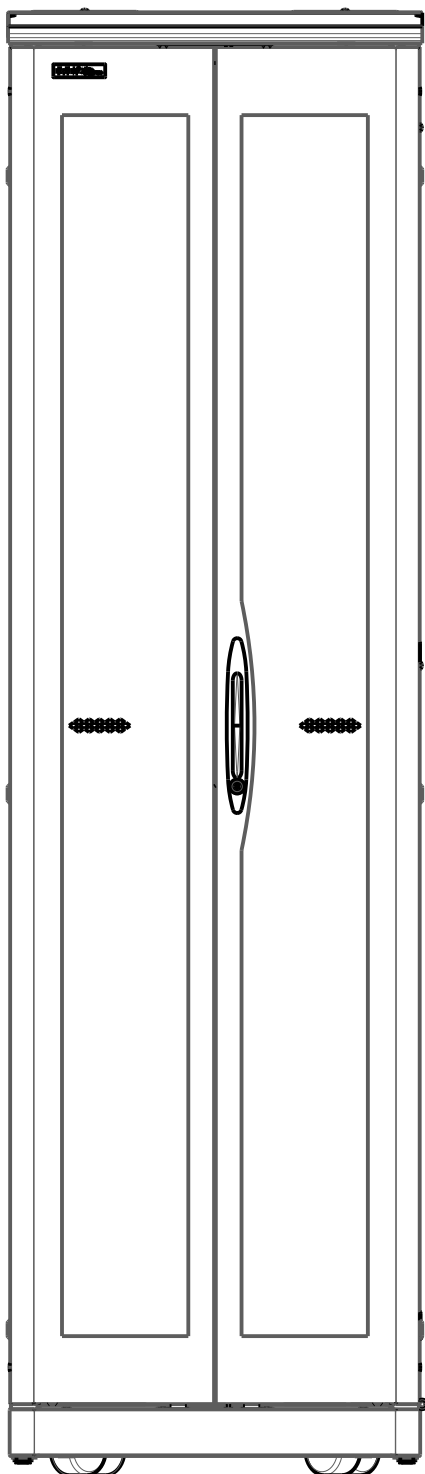


REAR

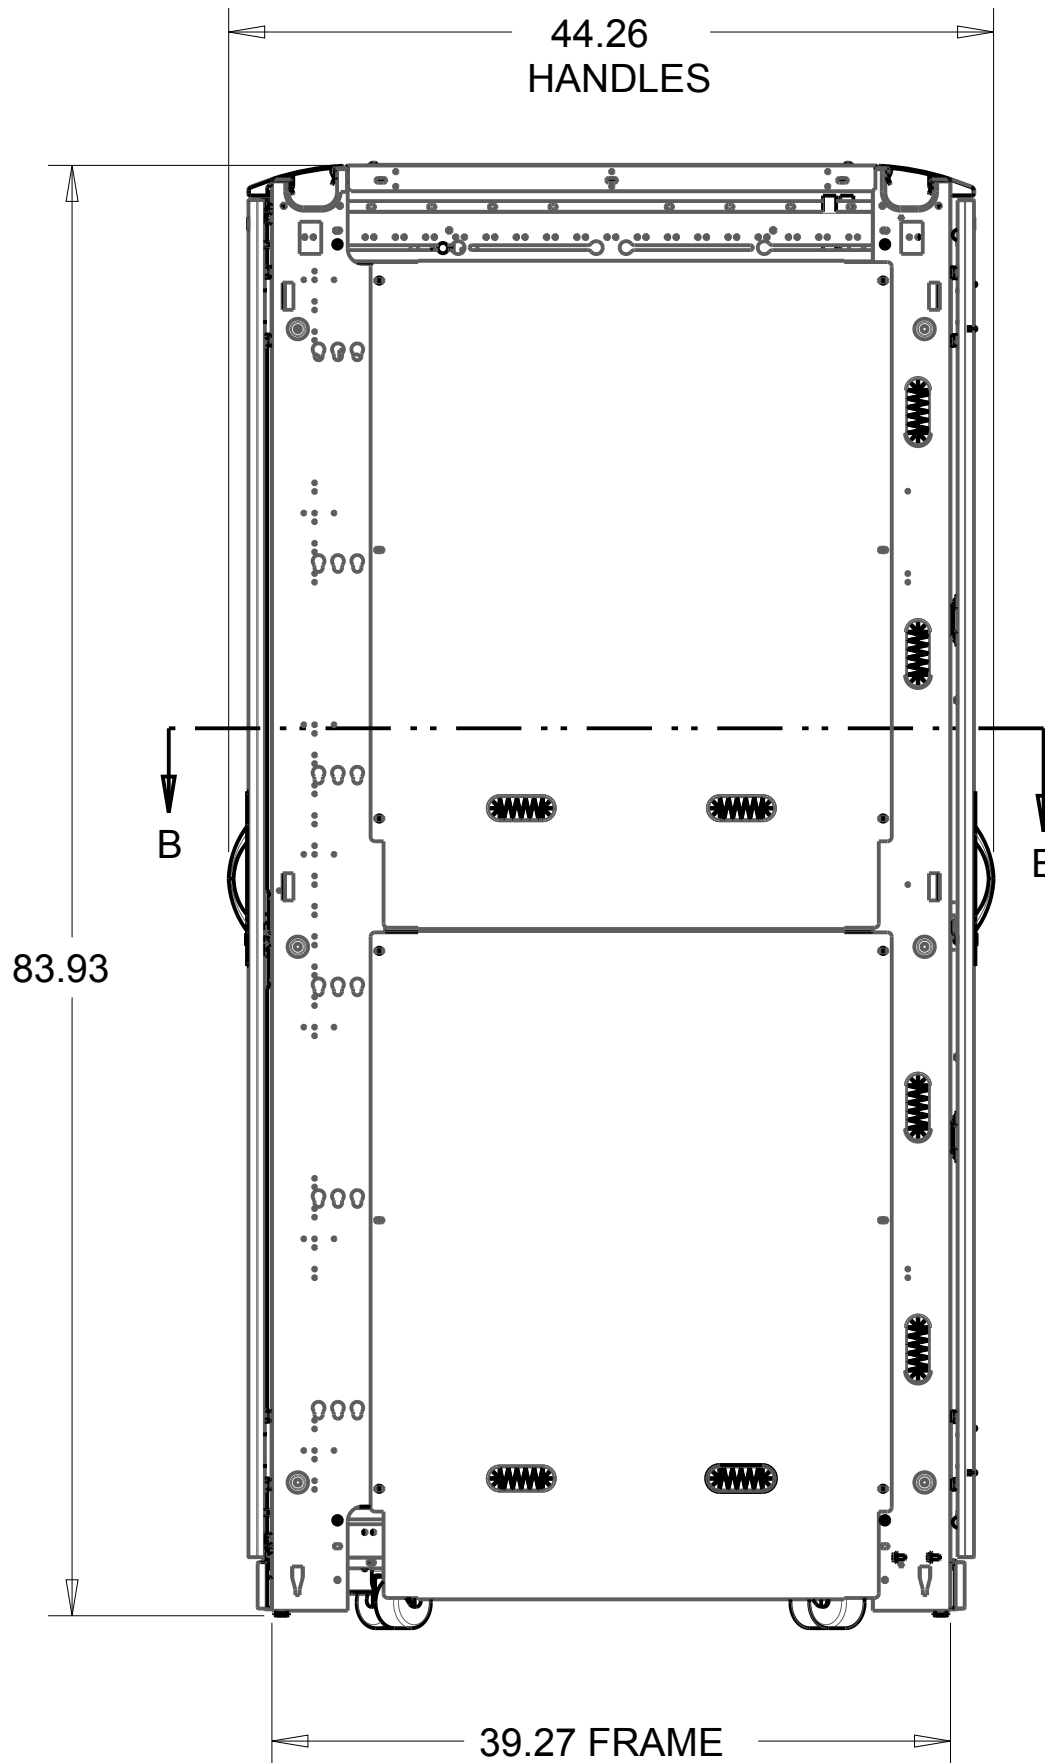



LEFT SIDE

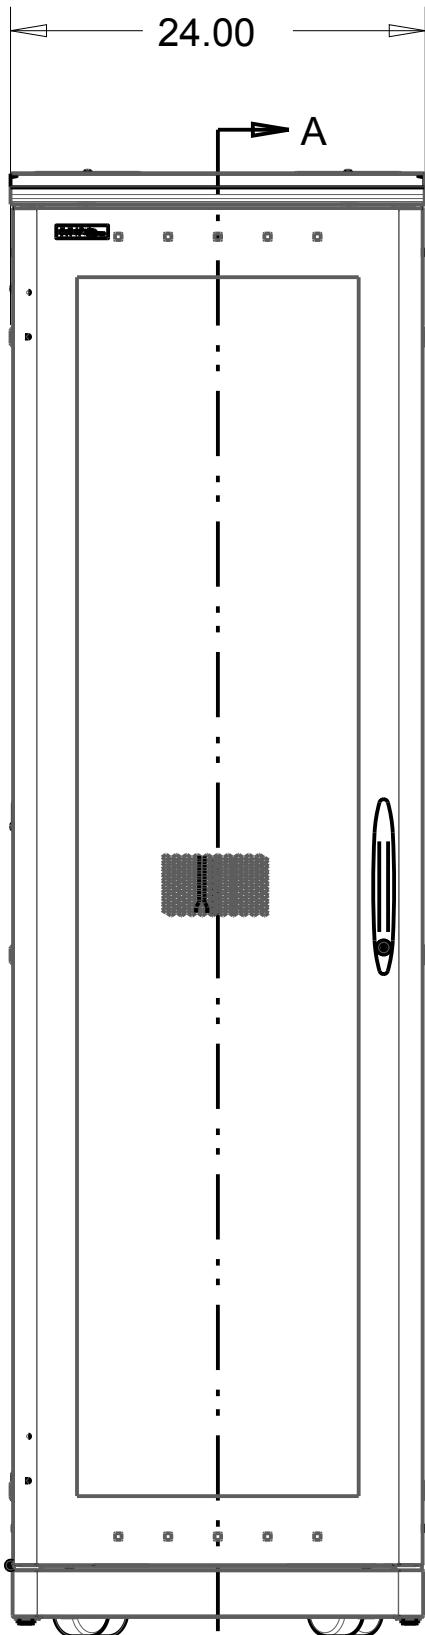

FRONT

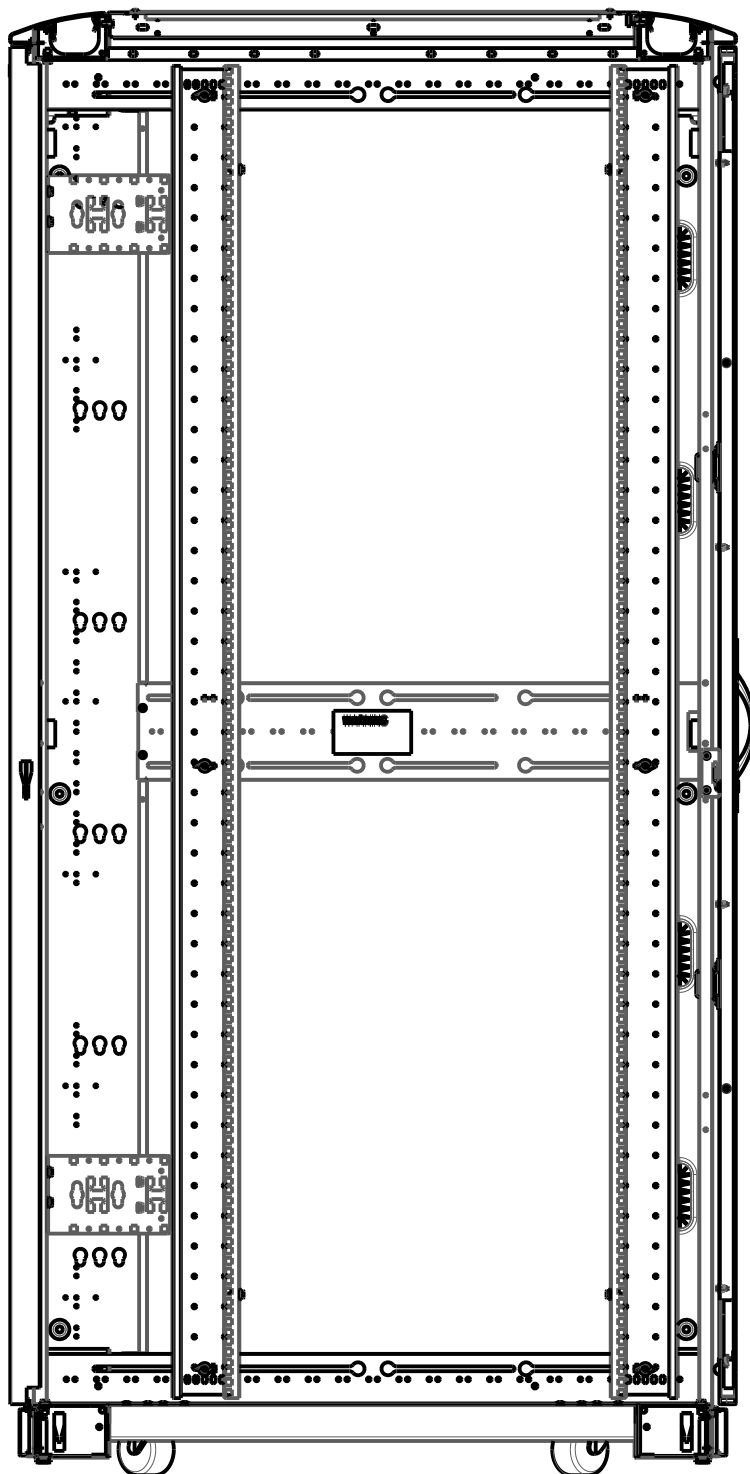

SECTION A-A

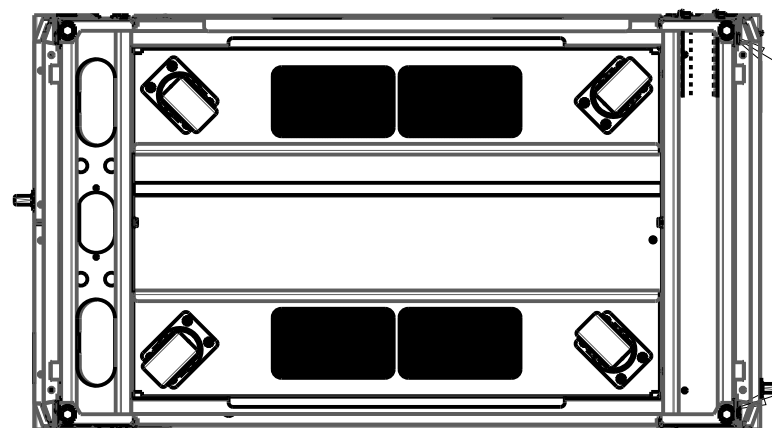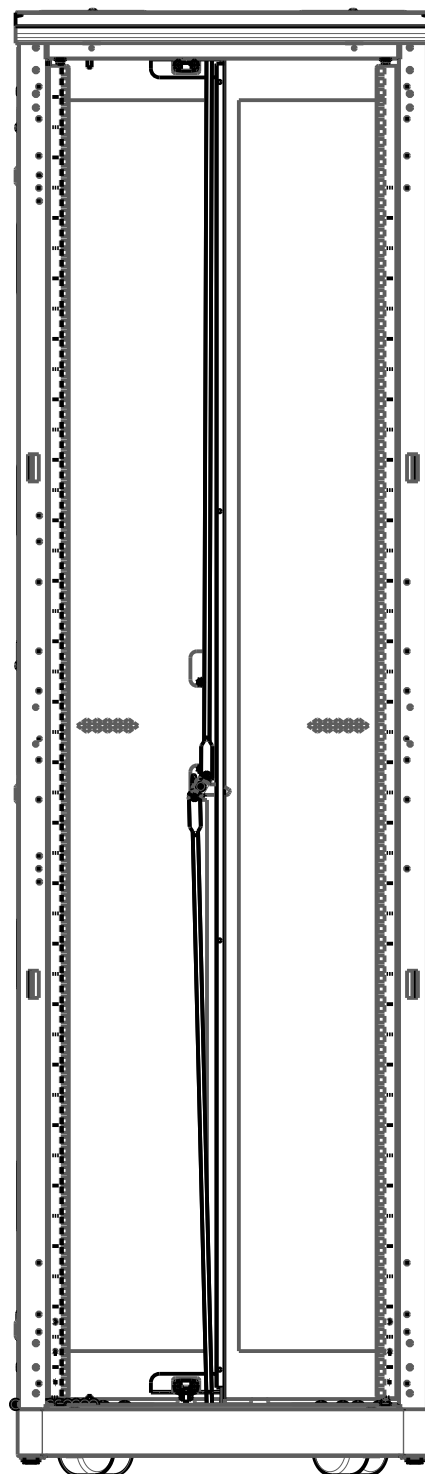

BOTTOM

LEVELING FEET

A	03/04/15	RArora	REPLACE PDUBRCKTW WITH PDUBRCKTWPMT (WIDER PDU BRACKET)	ECO-077724
REV	REV. DATE	REV'D BY	CURRENT REVISION DESCRIPTION	ECN OR EPR NUMBER

THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND IS LOANED SUBJECT TO RETURN UPON DEMAND AND UPON THE EXPRESS CONDITION THAT IT WILL NOT BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF EATON CORPORATION		CAGE NUMBER: 81824		ORIG EPR: EPR144344					
		DESIGN MGMT SITE: Worcester		DES. BY RArora	01/12/15				
		MATERIAL:		DRWN. BY RArora	01/12/15	CONFIG - 44U X 24W X 42D S-SERIES W/ RACK HYGIENE			
		MATERIAL FINISH:		PROD GRP 50 - Paramount					
DRAWN IN THIRD ANGLE PROJECTION		TOLERANCE UNLESS SPEC'D .XX ± .02 .XXX ± .005 ∠ ± 1°		COLOR: -		SHEET: 3 OF 8			
ALL DIMENSIONS IN INCHES		OTHER: -		CRS GA: N/A		REV DATE: 03/04/15			
		SPEC #				D ETN-ENC442442S REV A			

wright•line						DESCRIPTION				ASSEMBLY NUMBER				REVISION					
						CONFIG - 44U X 24W X 42D S-SERIES W/ RACK HYGIENE				ETN-ENC442442S				A 03/04/15					
ITEM NO.	PART TYPE	NEW REL	PREV REL	REV'D REL	NO ACT	NUMBER	ASSY LVL	REV	DESCRIPTION1	DESCRIPTION2	QTY	PRODUCT GROUP	VENDOR	VENDOR P/N	NOTES	RELEASE STATUS	MAKE/ BUY	NEW PART	
1	MA					ETN-ENC442442S	1	A	CONFIG - 44U X 24W X 42D	S-SERIES W/ RACK HYGIENE	1	50 - Paramount	-	-		Production	M	X	
2	MA					PMTFRM442440	2	A	WLD - FRAME, 44U X 24W X 40D	W/ RACK HYGIENE	1	50 - Paramount				Production	M	X	
3	MA					24885X	3	A	WLD - FRAME, 44U, 84H X 24W X 40D	SPECIAL - EATON, HYGIENE, 2 EPDU	1	50 - Paramount				Production	M	X	
4	MP					23719X	4	A	WELDMENT- BOTTOM FRAME	24"W X 40"D	1	50 - Paramount				Production	M	X	
5	SA					98165	5	-	WELDMENT - 24" WIDE	BTM CHANNEL/REINFORCEMENTS	1	50 - Paramount				Production		X	
6	SM					98164	6	A	BOTTOM CHANNEL	24" WIDE, EATON CHANNEL	1	50 - Paramount				Production		-	
7	SM					87648	6	F	BOTTOM REINFORCEMENT	LEFT HAND	1	50 - Paramount				Production			
8	SM					87649	6	F	BOTTOM REINFORCEMENT	RIGHT HAND	1	50 - Paramount				Production			
9	CP					68553	6	-	3/8 - 16 WELDNUT		2	50				Production			
10	SM					96899	5	-	RACK MOUNT RAIL TRACK	42" DEEP	2	50 - Paramount				Production		-	
11	SA					96933	5	-	WLD-REAR,BTM CHANNEL, 24W, DELL	BTM CHANNEL/REINFORCEMENTS	1	50 - Paramount				Production		X	
12	SM					96932	6	D	REAR,BTM CHANNEL, 24W, DELL	24" WIDE	1	50 - Paramount				Production		-	
13	SM					87648	6	F	BOTTOM REINFORCEMENT	LEFT HAND	1	50 - Paramount				Production			
14	SM					87649	6	F	BOTTOM REINFORCEMENT	RIGHT HAND	1	50 - Paramount				Production			
15	CP					68553	6	-	3/8 - 16 WELDNUT		2	50				Production			
16	CP					87334	5	-	THREADED INSERT - 1/4 - 20		4					Production			
17	CP					54348	5	-	SCREW,1/4-20X1/2 HEX WSHR HD		4		-	-		Production	B	-	
18	SM					97394	4	C	UPRIGHT - LH, 84" HIGH	WELDED - CUSTOM	1	50 - Paramount				Production			
19	SM					97395	4	D	UPRIGHT - RH, 84" HIGH	WELDED - CUSTOM	1	50 - Paramount				Production			
20	SM					99158	4	C	UPRIGHT - REAR LH, 84" HIGH	WELDED, CUST, 2 EPDU	1	50 - Paramount				Production	M	-	
21	SM					99159	4	C	UPRIGHT - REAR RH, 84" HIGH	WELDED - CUST, 2 EPDU	1	50 - Paramount				Production	M	X	
22	MP					23721X	4	A	WELDMENT- TOP FRAME	24W X 40D	1	50 - Paramount				Production	M	X	
23	SA					96935	5	-	WLD-FRONT,TOP CHANNEL,24W,DELL	TOP CHANNEL/REINFORCEMENTS	1	50 - Paramount	-	-		Production	M	X	
24	SM					96934	6	A	FRONT,TOP CHANNEL, 24W, DELL	WELDED - K/D FRAME	1	50 - Paramount	-	-		Production	M	X	
25	SM					87650	6	F	TOP REINFORCEMENT	LEFT HAND	1	50 - Paramount				Production			
26	SM					87651	6	F	TOP REINFORCEMENT	RIGHT HAND	1	50 - Paramount				Production			
27	SM					96899	5	-	RACK MOUNT RAIL TRACK	42" DEEP	2	50 - Paramount				Production		-	
28	SA					96937	5	-	WLD-REAR,TOP CHANNEL, 24W, DELL	TOP CHANNEL/REINFORCEMENTS	1	50 - Paramount	-	-		Production	M	X	
29	SM					96936	6	B	REAR,TOP CHANNEL, 24W, DELL	WELDED - K/D FRAME	1	50 - Paramount	-	-		Production	M	X	
30	SM					87650	6	F	TOP REINFORCEMENT	LEFT HAND	1	50 - Paramount				Production			
31	SM					87651	6	F	TOP REINFORCEMENT	RIGHT HAND	1	50 - Paramount				Production			
32	CP					87334	5	-	THREADED INSERT - 1/4 - 20		4					Production			
33	CP					54348	5	-	SCREW,1/4-20X1/2 HEX WSHR HD		4		-	-		Production	B	-	
34	SM					24880X	4	-	CENTER RAIL MOUNT- 40" DEEP	EATON CUST, 2 EPDU REAR POST	2	50 - Paramount				Production		-	
35	CP					82555	4	-	SCREW, 10-24 X1/2 FHTF SWAGE FM	-	8					Production	B		
36	SM					8686X	4	A	BRACKET	BOTTOM FILLER	4	50 - Paramount				Production			
37	CP					66714	4	H	SCREW, PAN HEAD SWAGEFORM	(OR EQUIVALENT)	8					Production	B		
38	CP					80290	4	L	BLIND RIVET, 1/4" DIA.	SD 84 BS	8	Multiple Association				Production			
39	CP					87448	3	-	WARNING LABEL	TIPPING HAZARD	2					Production			
40	CP					89942	3	A	LEVELER, 3/8-16 X 2-1/2		4	50	OHIO NUT & BOLT CO.	FHS3339		Production	M		
41	CP					87654	3	-	PEM STUD - FLUSH HEAD	1/4-20 X .625	4		PEM	FH-024-10-ZI		Production	B		
42	CR					87260	3	C	FILLER STRIP	-	2	50 - Paramount	-	-		Production	B	-	

wright•line						DESCRIPTION				ASSEMBLY NUMBER				REVISION					
						CONFIG - 44U X 24W X 42D				ETN-ENC442442S				A					
						S-SERIES W/ RACK HYGIENE								03/04/15					
43	SA					PMKIT44	3	-	WELDED FRAME KIT		1	50 - Paramount					Production		
44	MA					JRM10000_	2	-	RACK MOUNT RAILS - 44U	19" EIA, .375 SQ. HOLE	1	50 - Paramount					Production		-
45	SA					13152X	3	-	RACK MOUNT RAIL - 44U x 19"EIA, LH, SQ. HOLE	PARAMOUNT	2	50 - Paramount					Production		-
46	SM					13148X	4	A	RACK MOUNT RAIL - 19"EIA, 44U, SQ. HOLE	PARAMOUNT	1	50 - Paramount					Production		-
47	SM					13148X	5	A	RACK MOUNT RAIL - 19" EIA 44U, SQ. HOLE	PARAMOUNT	1	50 - Paramount					Production		-
48	CP					87334	5	-	THREADED INSERT - 1/4 - 20		2						Production		
49	CP					54348	5	-	SCREW,1/4-20X1/2 HEX WSHR HD		2		-	-			Production	B	-
50	CP					WHITE_INK	4	A	WHITE INK		1						Production		-
51	SA					13151X	3	-	RACK MOUNT RAIL - 44U x 19"EIA, RH, SQ. HOLE	PARAMOUNT	2	50 - Paramount					Production		-
52	SM					13148X	4	A	RACK MOUNT RAIL - 19"EIA, 44U, SQ. HOLE	PARAMOUNT	1	50 - Paramount					Production		-
53	SM					13148X	5	A	RACK MOUNT RAIL - 19" EIA 44U, SQ. HOLE	PARAMOUNT	1	50 - Paramount					Production		-
54	CP					87334	5	-	THREADED INSERT - 1/4 - 20		2						Production		
55	CP					54348	5	-	SCREW,1/4-20X1/2 HEX WSHR HD		2		-	-			Production	B	-
56	CP					WHITE_INK	4	A	WHITE INK		1						Production		-
57	CP					81645	3	-	BOLT, CARRIAGE	1/4-20 x 1"	12	60 - Profile	FASTENAL	#21155			Production		
58	CP					81710	3	E	WASHER, 5/16 SAE FLAT, BLACK		12						Production		
59	CP					87382	3	-	KNOB, T-HANDLE	1/4-20, BLACK	12						Production		
60	SA					PMKIT5	3	-	KIT, RACK MOUNT RAILS	44 U SQ. HOLES	1	50 - Paramount					Production		
61	MA					PMTNWTP2442	2	-	ASSEMBLY - TOP PANEL, 24W X 42D	(2) X 6" CABLE PORTS	1	-					Production	M	X
62	SA					23717X	3	A	WELDMENT- TOP PANEL	24" W x 40"D	1	50 - Paramount	-	-			Production	M	-
63	SM					23717X	4	A	ENCLOSURE TOP PANEL	24" W x 40" D	1	50 - Paramount	-	-			Production	M	-
64	CP					87482	4	-	WELD STUD	1/4-20 x .75" LONG	1		-	-			Production	B	-
65	SM					91179	4	-	STIFFENER	40" DEEP PARAMOUNT TOP	1						Production	M	X
66	CP					54348	3	-	SCREW,1/4-20X1/2 HEX WSHR HD		6		-	-			Production	B	-
67	MA					19384X	3	-	ASSY, PANEL, BRUSH TOP - 45"DP	NETWORK PARAMOUNT	2	51 - Vantage VS2					Production		X
68	SM					19381X	4	-	PANEL, BRUSH TOP - 45"DP. NTWK PARAMT	FOR DBL. WD. RECT. TOP CUTOUT	1	50 - Paramount					Production	M	X
69	CR					91167	4	-	BRUSH STRIP - 3" WIDE, NYLON	26.00" LONG	2	Multiple Association	McMASTER-CARR				Production	M	X
70	CP					66714	3	H	SCREW, PAN HEAD SWAGEFORM	(OR EQUIVALENT)	4						Production	B	
71	MA					JDHF8424L	2	A	DOOR, HIGH FLOW	44U X 24"W, LH	1	50 - Paramount					Production		-
72	SA					18470X	3	A	WLDMNT-DOOR FRAME, EXP MTL	84" HIGH x 24" WIDE	1	50 - Paramount					Production		X
73	SM					94101	4	-	DOOR PANEL, EXP MTL	84" H x 24" W	1	50 Paramount					Production		X
74	SM					87355	4	H	DOOR STIFFENER A	84" HIGH (HINGE SIDE)	1	50 - Paramount					Production		
75	SM					87356	4	L	DOOR STIFFENER B	84" HIGH (HANDLE SIDE)	1	50 - Paramount					Production		
76	SM					100512	4	-	DOOR STIFFENER HORIZONTAL	24"W EXP MTL SCR'D NOT WLD	2	50 - Paramount					Production		X
77	SM					87361	4	C	HINGE	OUTER	2	50 - Paramount					Production	M	
78	CP					87334	4	-	THREADED INSERT - 1/4 - 20		2						Production		
79	CP					54348	4	-	SCREW,1/4-20X1/2 HEX WSHR HD		2		-	-			Production	B	-
80	CP					66714	4	H	SCREW, PAN HEAD SWAGEFORM	(OR EQUIVALENT)	6						Production	B	
81	SM					100602	4	-	INSERT, EXP METAL, 84"H X 24"W DOOR	-	1	50 - Paramount					Production		
82	SM					103198	5	-	INSERT, EXPANDED METAL, xx"W X xx"H	-	1	50 - Paramount					Production		
83	SM					100515	4	-	BRKT, EXP MTL RET, 24"W	-	2	50 - Paramount					Production		
84	SM					100515	5	-	BRKT, EXP MTL RET, 24"W	-	1	50 - Paramount					Production		
85	CP					97514	4	A	SCREW,SELF DRILL,HEX #10 x .50 LG	-	18	16 - Air Flow Mgnt	McMaster-Carr	90064A480			Production	B	X

wright•line						DESCRIPTION						ASSEMBLY NUMBER				REVISION					
						CONFIG - 44U X 24W X 42D S-SERIES W/ RACK HYGIENE						ETN-ENC442442S				A 03/04/15					
86	SM					100904	4	-	EXP MTL CLAMP, 84" DOOR	-	2	16 - Air Flow Management					Production				
87	SM					100904	5	-	EXP MTL CLMP, 84" DOOR	-	1	16 - Air Flow Management					Production				
88	CP					68374	3	AB	SCREW, #8 AB X .500 PH PN HD SHT		4	-					Production				
89	CA					87316	3	-	GRABBER LATCH		2						Production				
90	CP					87316_FEMALE	4	-	GRABBER LATCH	FEMALE HALF	1						Production				
91	CP					87316_MALE	4	-	KEEPER - 87316		1	50 - Paramount					Production				
92	CP					8709M	3	B	ESCUTCHEON PLATE	W/ LOCK HOLE	1	50 - Paramount					Production				
93	CP					87610	3	-	LOCK HOUSING - 90 DEGREE		1	N/A					Production				
94	CP					87610	4	-	LOCK HOUSING - 90 DEGREE		1						Production				
95	CP					87611	4	-	LOCK HOUSING - 180 DEGREE		1	N/A					Prototype				
96	CP					LOCK_CYLINDER	5	-	LOCK CYLINDER		1	N/A					Production				
97	CP					250-LOCKCAM_SCREW5	5	-	SCREW- CAM LOCK		1	N/A					Production				
98	CP					250X250_LOCK_SCREW	5	-	SCREW 1/4 X 250		1	N/A					Production				
99	CP					250WASHER	6	-	1/4 INTERNAL OR EXTERNAL TOOTH WASHER		1	N/A					Production				
100	CP					60297	3	B	#3 SPRING CLIP LOCK		1						Production	M			
101	SM					9237X	3	B	LOCK CAM	SINGLE DOOR	1	50 - Paramount					Production				
102	CP					82201	3	-	BUMPER - PRESSURE SENSITIVE		2						Production				
103	CP					18977	3	-	LOCK WASHER - #10 / M4 EXT TOOTH	-	2	50 - Paramount					Production	B			
104	CP					82787	3	-	SCREW, M4 PH FIL HD, MACHINE	10MM LONG	2						Production	B			
105	CP					87332	3	A	HANDLE		1	Multiple Association					Production	B			
106	SA					PMKIT31	3	-	KIT, 84"	DOOR ASY	1						Prototype				
107	SM					8689X	3	B	LOCK STRIKE		1	50 - Paramount					Production		-		
108	CP					66714	3	H	SCREW, PAN HEAD SWAGEFORM	(OR EQUIVALENT)	2						Production	B			
109	MP					87399	3	-	HINGE	FRAME SIDE	2						Production				
110	CP					54348	3	-	SCREW,1/4-20X1/2 HEX WSHR HD		4		-		-		Production	B	-		
111	CP					96389	3	A	LABEL - GENERAL DATA CENTER	MEDIUM	1						Production	B	X		
112	MA					JDDHF8424	2	A	ASSEMBLY - SPLIT DOOR, HIGH FLOW	84"H X 24"W	1	50 - Paramount					Production		-		
113	SA					18831X	3	-	WELDMENT - SPLIT DOOR	84"H x 12"W, EXPANDED METAL, RH	1	50 - Paramount					Production	M	-		
114	SM					88798	4	-	SPLIT DOOR - PERF	84"H X 12"W, RIGHT	1	50 - Paramount					Production		-		
115	SM					88813	4	C	STIFFENER- SPLIT DOOR	84" HIGH	1	50 - Paramount					Production		-		
116	SM					87361	4	C	HINGE	OUTER	2	50 - Paramount					Production	M			
117	CP					66714	4	H	SCREW, PAN HEAD SWAGEFORM	(OR EQUIVALENT)	6						Production	B			
118	CP					87334	4	-	THREADED INSERT - 1/4 - 20		2						Production				
119	CP					54348	4	-	SCREW,1/4-20X1/2 HEX WSHR HD		2		-		-		Production	B	-		
120	SM					88815	4	C	GUIDE - LOCK BAR	SPLIT DOORS	2	50 - Paramount					Production				
121	SM					94264	4	-	PANEL, INSERT, EXPANDED METAL W/ CUTOUTS	RH SPLIT DOOR 84"H X 12"W	1	50 - Paramount					Production	M	X		
122	SA					18830X	3	-	WELDMENT - SPLIT DOOR	84"H x 12"W, EXPANDED METAL, LH	1	50 - Paramount					Production	M	-		
123	SM					88797	4	-	SPLIT DOOR - PERF	84"H X 12"W, LEFT	1	50 - Paramount					Production		-		
124	SM					88813	4	C	STIFFENER- SPLIT DOOR	84" HIGH	1	50 - Paramount					Production		-		
125	SM					87361	4	C	HINGE	OUTER	2	50 - Paramount					Production	M			
126	CP					66714	4	H	SCREW, PAN HEAD SWAGEFORM	(OR EQUIVALENT)	6						Production	B			
127	CP					87334	4	-	THREADED INSERT - 1/4 - 20		2						Production				
128	CP					54348	4	-	SCREW,1/4-20X1/2 HEX WSHR HD		2		-		-		Production	B	-		

wright•line						DESCRIPTION				ASSEMBLY NUMBER				REVISION					
						CONFIG - 44U X 24W X 42D S-SERIES W/ RACK HYGIENE				ETN-ENC442442S				A 03/04/15					
129	SM					94111	4	-	PANEL, INSERT, EXPANDED METAL	LH SPLIT DOOR 84"H X 12"W	1	50 - Paramount					Production	M	X
130	MP					87399	3	-	HINGE	FRAME SIDE	4						Production		
131	CP					54348	3	-	SCREW, 1/4-20X1/2 HEX WSHR HD		8		-		-		Production	B	-
132	CP					8709M	3	B	ESCUTCHEON PLATE	W/ LOCK HOLE	1	50 - Paramount					Production		
133	CP					87332	3	A	HANDLE		1	Multiple Association					Production	B	
134	CP					18977	3	-	LOCK WASHER - #10 / M4 EXT TOOTH	-	2	50 - Paramount					Production	B	
135	CP					82787	3	-	SCREW, M4 PH FIL HD, MACHINE	10MM LONG	2						Production	B	
136	CP					87611	3	-	LOCK HOUSING - 180 DEGREE		1	N/A					Prototype		
137	CP					LOCK_CYLINDER	4	-	LOCK CYLINDER		1	N/A					Production		
138	CP					250-LOCKCAM_SCREW	4	-	SCREW- CAM LOCK		1	N/A					Production		
139	CP					250X250_LOCK_SCREW	5	-	SCREW 1/4 X 250		1	N/A					Production		
140	CP					250WASHER	5	-	1/4 INTERNAL OR EXTERNAL TOOTH WASHER		1	N/A					Production		
141	CP					60297	3	B	#3 SPRING CLIP LOCK		1						Production	M	
142	SM					11199X	3	D	LOCK CAM - SPLIT DOOR	-	1	50 - Paramount					Production		
143	SM					11199X	4	D	LOCK CAM	SPLIT DOOR	1	50 - Paramount					Production		
144						FH-032-8ZI	4	1	STUD, CLINCH, 10-32 X 1/2 LG, PEM ZINC		2						Prototype		
145	MP					8642M	3	D	LOCKBAR	BOTTOM - 84"H PARAMOUNT	1	50 - Paramount					Production	M	-
146	MP					7238M	3	D	LOCKBAR	84" TOP	1	50 - Paramount					Production	M	-
147	SM					11145X	3	-	DOOR STOP - SPLIT DOOR	-	2	50 - Paramount					Production		
148	CP					66714	3	H	SCREW, PAN HEAD SWAGEFORM	(OR EQUIVALENT)	4						Production	B	
149	CP					R9823-1-Z1	3	A	ROLLER CATCH, 1.25 L	1.38W X .62H, ZINC PLT.	2	31 - Vantage Enclosures					Production	B	
150						R9823-1_ROLLERHSG	4	-			1						Production		
151						R9823-1_SPRING	4	-			1						Production		
152						R9823-1_PIN	4	-			1						Production		
153						R9823-1_ROLLER	4	-			1						Production		
154						R9823-1_BRACKET	4	-			1						Production		
155	CP					68374	3	AB	SCREW, #8 AB X .500 PH PN HD SHT		4	-					Production		
156	CP					96389	3	A	LABEL - GENERAL DATA CENTER	MEDIUM	1						Production	B	X
157	CP					93346	3	-	#10-32 LOCKNUT, NYLON INSERT		2						Production	B	
158						90633A411_ANY	4	-			1						Prototype		
159						NONE-350	5	-			1						Production		
160						NONE-2596	5	-			1						Production		
161	MA					PMTJVD4442S	2	A	DIVIDER PANEL ASY - 44U X 42D	SPECIAL, EATON CHANNEL	1	50 - Paramount	-		-		Production	M	X
162	SA					24888X	3	A	DIVIDER PANEL - 44U X 42D, SOLID	SPECIAL, EATON CHANNEL	2	50 Paramount					Production		
163	SM					24888X	4	A	EXT. DIVIDER PANEL - 44U X 42D	EATON CHANNEL	1	50 - Paramount					Production		-
164	CP					87482	4	-	WELD STUD	1/4-20 x .75" LONG	2		-		-		Production	B	-
165	MA					JWOVLGROM	3	A	GROMMET - OVAL 1.5WX4L	-	4	-					Production	M	-
166						96918	4	-	GROMMET, 1.5" DIA X 4.0"LG		1						Production		
167	CP					94987	3	H	SCREW, PAN HD 10-24X1/4" THD. FRMG	ZINC FINISH	8						Production	B	
168	MA					JWOVLGROM	2	A	GROMMET - OVAL 1.5WX4L	-	8	-					Production	M	-
169						96918	3	-	GROMMET, 1.5" DIA X 4.0"LG		1						Production		
170	SA					GRNDPMT	2	-	GROUND KIT - PARAMOUNT		1						Production		
171	MA					JFTK24____	2	B	FRAME TRIM KIT - 24"W	SETUP FOR 40" D x 84"H	1	50 - Paramount					Production		

wright•line						DESCRIPTION				ASSEMBLY NUMBER				REVISION				
						CONFIG - 44U X 24W X 42D				ETN-ENC442442S				A				
						S-SERIES W/ RACK HYGIENE								03/04/15				
172	SM					8614X	3	G	TOP TRIM	24" WIDE	2	50 - Paramount				Production		-
173	SC					17285X	3	-	WIREWAY COVER	24" ONE PIECE DUAL NOTCH	2	50 - Paramount				Production		-
174	CP					66714	3	H	SCREW, PAN HEAD SWAGEFORM	(OR EQUIVALENT)	8					Production	B	
175	SM					8684X_GENERIC	3	F	BOTTOM FILLER - 24" W		2	50 - Paramount				Production		-
176						PMKIT56	3	-	TRIM INSTALLATION KIT	-	1					Production		
177	SA					PDUBRCKTPMT	2	-	POWER STRIP BRACKET ASSY - PMT FRAME	PARAMOUNT	1	50 - Paramount				Production	M	X
178	MA					29099X	3	-	PDU BRACKET - PMT FRAME	PARAMOUNT	2	-				Production	M	X
179	MP					29099X	4	-	PDU BRACKET - PMT FRAME	PARAMOUNT	1	50				Production	M	X
180	CP					87858	3	-	WASHER, 1/4", INT/EXT TOOTH		4					Production		
181	CP					54348	3	-	SCREW,1/4-20X1/2 HEX WSHR HD		4		-	-		Production	B	-
182	MA					JCSTR40	2	D	CASTER BRACKET ASSY, 40"	SETUP FOR 30"W PARAMOUNT	1	Multiple Association				Production	M	X
183	MA					13785X	3	C	40" CASTER BRACKETS	PARAMOUNT 40" DEEP	2	Multiple Association				Production	M	X
184	SM					13785X	4	C	CASTER BRACKET - 40" DEEP	PARAMOUNT	1					Production	M	-
185	CP					88114	3	-	SCREW	1/4-20 X 3/4" CARRIAGE	16	30 - Misc Manufacturing				Production		
186	CP					89941	3	-	CASTER, 3" DIA.	SWIVEL - 500 lbs. cap.	4	Multiple Association				Production	M	
187	CP					80724	3	A	NUT,1/4-20 NYLON INSERT		16					Prototype		
188	CP					54348	3	-	SCREW,1/4-20X1/2 HEX WSHR HD		20		-	-		Production	B	-