


Retrofit Interior Kits

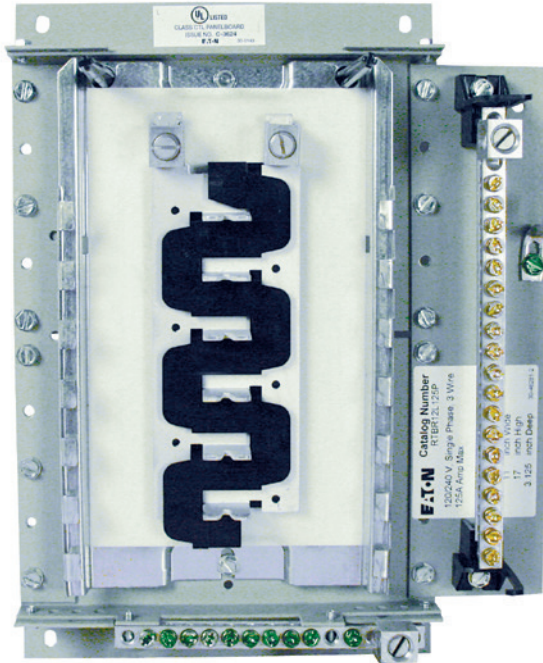

Uses existing panel box and wires

Eaton's unique Retrofit Interior allows the customer to cost-effectively and safely upgrade an electrical service without removing the existing enclosure from the wall.

The Retrofit Interior is designed and tested specifically for renovating an outdated electrical panel in an apartment, condominium, or a single family home. These outdated panels are being recognized by local inspectors and other authorities as a possible hazard.

Features:

- UL 67 Listed. (All UL listed part numbers are on the back of this sheet).
- Saves 2-3 hours compared to a complete panel change out; get off the job faster.
- Eliminates expensive and time consuming drywall repair.
- Replaces vintage brands that have hard to find, expensive replacement breakers.
- Safely upgrade to arc fault and ground fault breakers to meet current electrical code requirements.
- Eco-friendly in asbestos-filled environments.
- Meets 2008 NEC wire bending requirements.

Opportunities to Retrofit:

- Single or three phase.
- Main lug only or main breaker.
- Up to 42 circuits.
- Up to 400 Ampere.
- Available with CH Breakers (3/4") with copper bus or BR Breakers (1") with aluminum bus.
- The minimum warranty for residential loadcenters and breakers shall be as follows:
 - Limited lifetime warranty on all CH branch breakers and loadcenters.
 - 10-year warranty on all BR branch breakers and loadcenters.
- Refer to Eaton for complete warranty details.

Retrofit Interior Kit Specifications

Interior Cat #	Trim / Collar Cat #	UL67 Listed	Depth Min	Depth Max	Width Min	Width Max	Height Min	Height Max	1 Ph or 3 Ph	Main	Bus	Amp A	Ckts
BR Retrofit Interiors and Covers													
RTBR8L100P	CRTBR8ML****	Y	3.125	3.625	10.5	20	13	26	1	MLO	BR	100	8
RUBR8L100 -	CRTBR8ML****	Y	3.75	6	10.5	20	13	26	1	MLO	BR	100	8
RTBR12L100P	CRTBR12ML****	Y	3.125	3.625	10.5	20	14.5	26	1	MLO	BR	100	12
RTBR10B100P	CRTBR12ML****	Y	3.125	3.625	10.5	20	14.5	26	1	MLO	BR	100	10
RUBR12L100 -	CRUBR12ML****	Y	3.75	6	10.5	20	14.5	26	1	MLO	BR	100	12
RUBR10B100 -	CRUBR12ML****	Y	3.75	6	10.5	20	14.5	26	1	MB	BR	100	10
RTBR12L125P	CRTBR12ML****	Y	3.125	3.625	11	20	17	26	1	MLO	BR	125	12
RTBR10B125P	CRTBR12ML****	Y	3.125	3.625	11	20	17	26	1	MB	BR	125	10
RUBR12L125 -	CRUBR12ML****	Y	3.75	6	11	20	17	26	1	MLO	BR	125	12
RUBR10B125 -	CRUBR12ML****	Y	3.75	6	11	20	17	26	1	MB	BR	125	10
RABR20B125 -	CRABR20ML****	N	3.75	6	13	20	21	30	1	MCB	BR	125	20
RABR20L125 -	CRABR20ML****	N	3.75	6	13	20	21	30	1	MLO	BR	125	20
RBBR20B200 -	CRBBR20BW****	N	3.75	6	13	22	29	36	1	MLO	BR	200	20
RCBR40L200 -	CRCBR40ML****	N	3.75	6	13	22	34	41	1	MLO	BR	200	20
RDBR40B200 -	CRDBR40BW****	N	3.75	6	13	22	37	45	1	MLO	BR	200	20
CH Retrofit Interiors and Covers													
RWCH6L125N	CRWCH6ML****	N	3.125	4.125	7	9	8.5	12	1	MLO	CH	125A	6
RSCH10B125N	CRWCH12ML****	N	3.5	4.5	8.5	12	16.5	20	1	MCB	CH	125A	10
RSCH12L125N	CRWCH12ML****	N	3.5	4.5	8.5	12	16.5	20	1	MLO	CH	125A	12
RACH22B125J	CRACH24ML****	N	3.75	4.25	13	22	21	30	1	MCB	CH	125A	22
RACH24L125J	CRACH24ML****	N	3.75	4.25	13	22	21	30	1	MLO	CH	125A	24
RBCH24B200 -	CRBCH24CS****	N	3.75	6	13	22	29	36	1	MCB	CH	200A	24
RBCH32L200 -	CRBCH32ML****	N	3.75	6	13	22	29	36	1	MLO	CH	200A	32
RCCH32B200 -	CRBCH32CS****	N	3.75	6	13	22	34	41	1	MCB	CH	200A	32

A Amp for MB panels is maximum; catalog number will reflect actual amperage of breaker included. * Denotes characters in the catalog number which relate to overall cover size.

Example: CRTBR12ML2620 would signify a cover 26" H x 20" W.

Part numbers shown with " " at the end, need one of the following suffixes to denote depth:	
J	3.75 - 4.25
K	4.25 - 5.00
L	5.00 - 6.00
N	Non-adjustable

Example: RTBR12L125J would signify an interior set with a depth range of 3.75" to 4.25".

Complete Assembly*

Adjustable Interior

- Factory Installed ground and neutral bars positioned to accept existing wires.
- Field adjustable depth matches existing panel box.
- Adjustable height enables optional placement of the interior.
- Field bondable for service entrance options.



Adjustable Interior

Standard Trim and Collar

- Standard trim matches new interior.
- New circuit directory for updated labeling.
- Oversized collar eliminates



Collar & Assembly with Trim

How to Order:

1. Measure the existing panel enclosure to determine appropriate kits for your project.
 2. Match the existing dimensions with the above table to obtain the correct catalog number.
 3. Order your retrofit kit from a local Eaton authorized distributor.
- Need Assistance or can't find retrofit to fit existing enclosure?

Call Eaton's Residential Flex Center at 1-800-330-6479 for all your retrofit needs. Go to www.eaton.com/eccn to locate an Eaton Certified Contractor.

*** Note:** For complete assembly, interior and cover need to be ordered separately.



Powering Business Worldwide

Eaton Corporation
Electrical Group
1000 Cherrington Parkway
Moon Township, PA 15108
United States
877-ETN-CARE (877-386-2273)
Eaton.com

© 2012 Eaton Corporation
All Rights Reserved
Printed in USA
Publication No. SA00406001E / VCG1204
November 2012



Eaton is a registered trademark of Eaton Corporation.

All other trademarks are property of their respective owners.