Vickers®

Flow Controls

Service Parts Information

Flow Control Module

DGMFN-5-Y-*W-20 DGMFN-5-X-*W-20

Model	Body S/A	Spring	Diagram Plate	Pin
DGMFN-5-X-AW-20	587979	575031	630316	248868
DGMFN-5-X-BW-20	587983		630313	
DGMFN-5-X-PW-20	587985	575032	575034	248874
DGMFN-5-Y-AW-20	587977	575031	630315	248868
DGMFN-5-Y-BW-20	587981		630314	

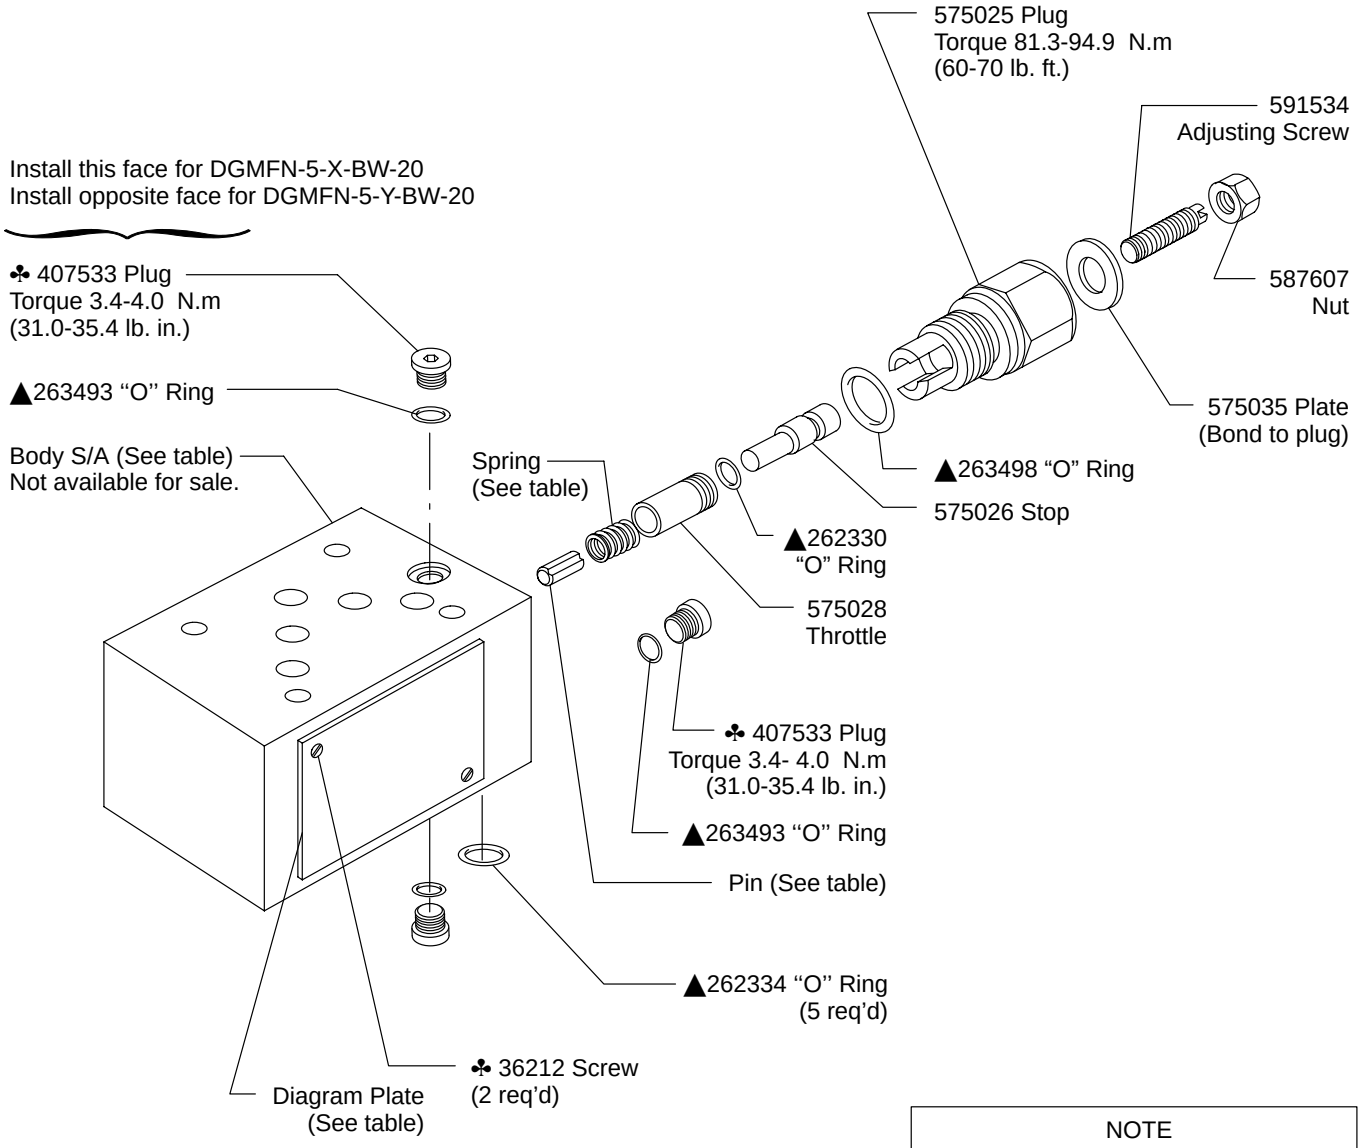

✤ Available only in kits of 25 each
All parts are metric

▲ Included in F3 Seal Kit 920246

NOTE

DGMFN-5-*-B*-20 model shown. -A*- and -P*- models have the parts located at opposite end of body. See back page for X-A, X-P and Y-A assembly.

Model Code

F3 - DGMFN - 5 - * - * W - 20

1 2 3 4 5 6 7

1 Seal Material

F3 - Seals for mineral oil and fire resistant fluids

2 Model Series

DGMFN - Modular valve Flow regulator, non-compensated

3 Interface

02 - NFPA–D
05 - CETOP

4 Direction of Flow

X - Meter in
Y - Meter out

5 Port Operated Upon

A port
B port
P port

6 Adjustment Mechanism

Standard slotted screw and locknut

7 Design

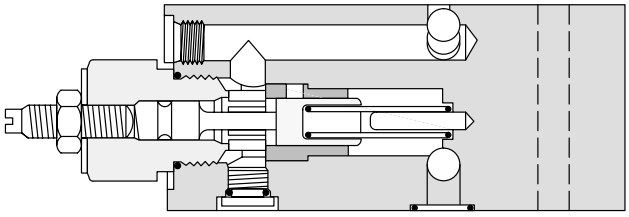

DGMFN-5-X-PW-20

DGMFN-5-Y-AW-20

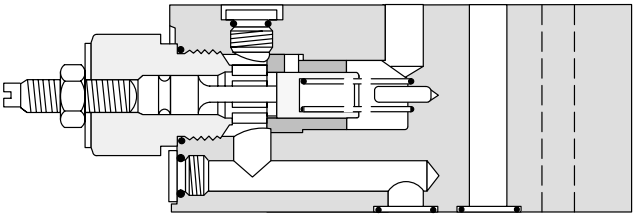

DGMFN-5-X-AW-20

For satisfactory service life of these components, use full flow filtration to provide fluid which meets ISO cleanliness code 20/18/15 or cleaner. Selections from Eaton OFP,OFR and OFRS filter series are recommended.

Printed in U.S.A.