Vickers®

Service Data

Pressure Relief

Single Type Pressure Relief Module

DGMC2-5-AB–*W–(E)–BA–*W–(E)–20

Model (A & B End)	"A" Spring	"B" Spring	Pressure Range bar	Pressure Range (PSI)	■ Relief Valve Kit
DGMC2-5-AB-AW-(E)-BA-AW-(E)-20	681645	631770	5.2 - 35	(75-500)	926534
DGMC2-5-AB-BW-(E)-BA-BW-(E)-20	681646		8.5 - 70	(125-1000)	926535
DGMC2-5-AB-CW-(E)-BA-CW-(E)-20	681647		8.5 - 140	(125-2000)	926536
DGMC2-5-AB-FW-(E)-BA-FW-(E)-20	681648	688768	8.5 - 250	(125-3600)	926537

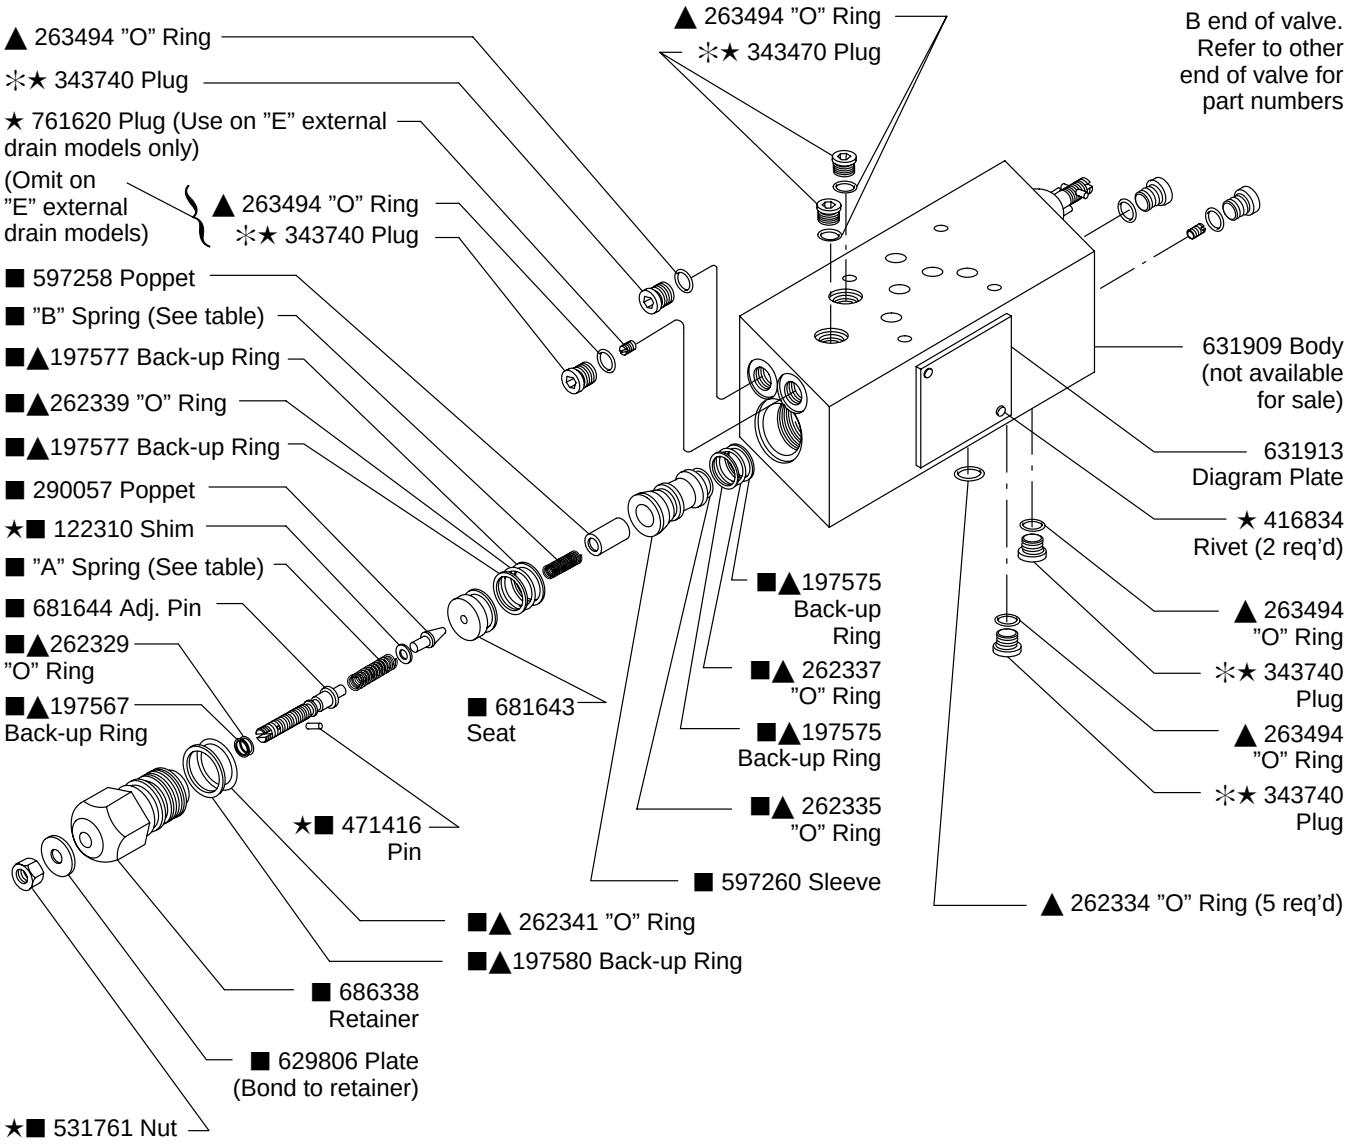

★ Available only in Kits of 25 each

▲ Included in F3 Seal Kit 920339

⁜ Torque all 343470 Plugs to 15-16 N.m (11-12 lb. ft.)

Model Code

(F3) DGMC2 - 5 - A B - * W - (E) - B A - * W - (E) - 20

1 2 3 4 5 6 7 8 9 10 11 12 13 14

1 **Seal Material**

F3 - Seals for mineral oil and fire resistant fluids

2 **Model Series**

DGMC - Directional valve, manifold or subplate mounted, module, pressure relief, crossport type

3 **Interface**

NFPA-D02
(ISO 4401-05)

4 **Port Acted Upon**

A - Cylinder 'A'

5 **Drain Port**

B - Cylinder 'B'

6 **Pressure Range (Cyl. 'A')**

	Bar	PSI
A -	5.2-35	(75-500)
B -	8.5-70	(125-1000)
C -	8.5-140	(125-2000)
F -	8.5-250	(125-3600)

7 **Screw & Locknut Adjustment**

8 **Drain**

E - External drain
(Omit for standard internal drain)

9 **Port Acted Upon**

B - Cylinder 'B'

10 **Drain Port**

A - Cylinder 'A'

11 **Pressure Range (Cyl. 'B')**

	Bar	PSI
A -	5.2-35	(75-500)
B -	8.5-70	(125-1000)
C -	8.5-140	(125-2000)
F -	8.5-250	(125-3600)

12 **Screw & Locknut Adjustment**

13 **Drain**

E - External drain
(Omit for standard internal drain)

14 **Design**

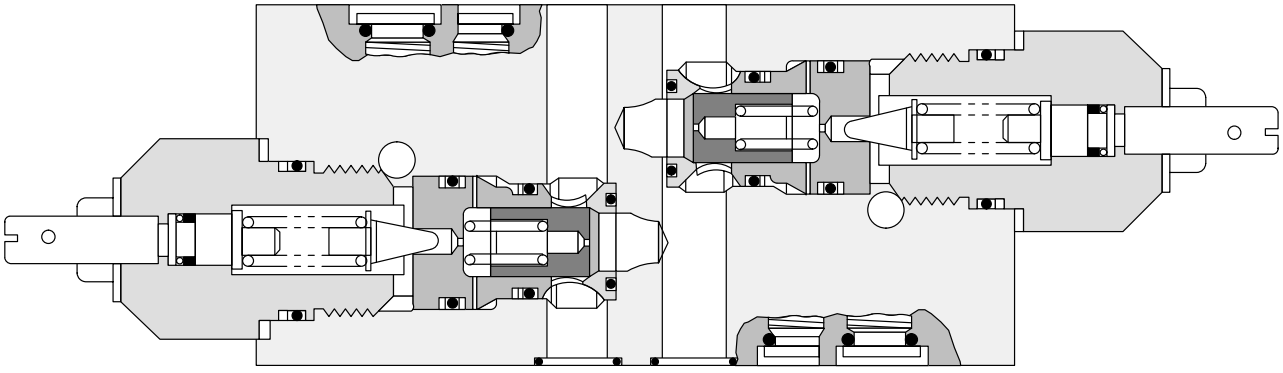

For satisfactory service life of these components, use full flow filtration to provide fluid which meets ISO cleanliness code 20/18/15 or cleaner. Selections from Eaton OFP,OFR and OFRS filter series are recommended.

Printed in U.S.A.