


# PRESSURE FILTER

## Series LF 101 464 PSI

Sheet No.  
**1125 C**

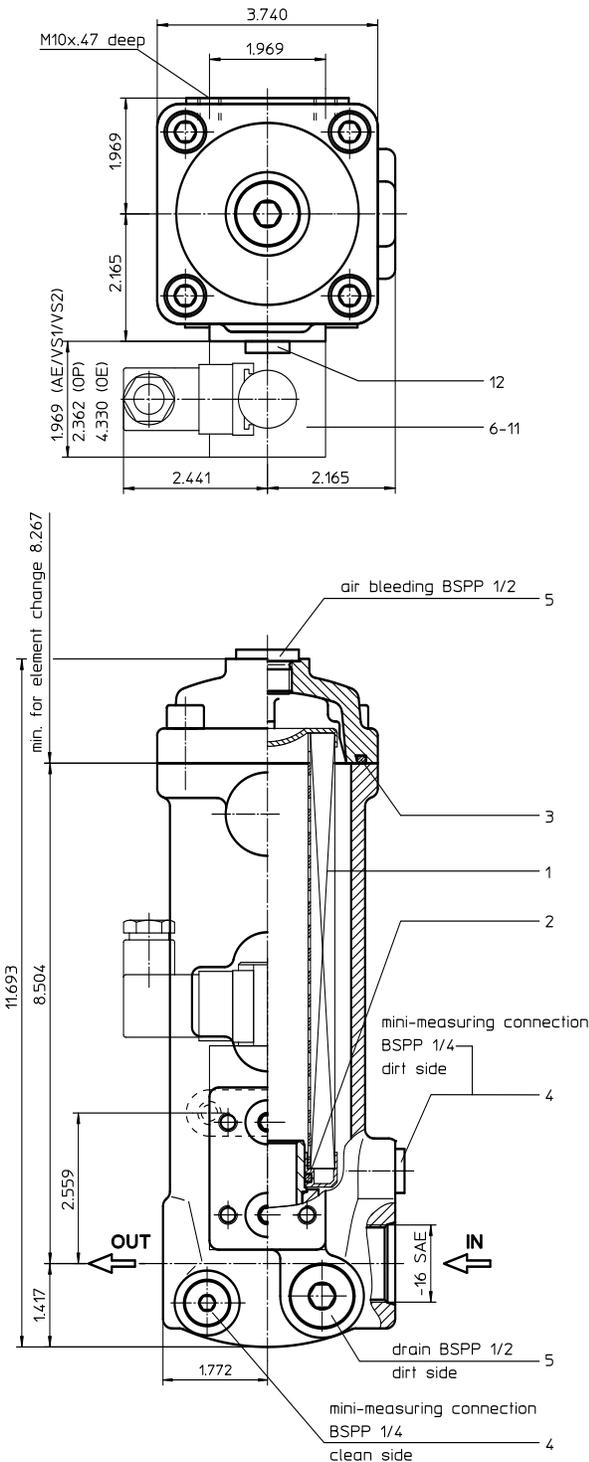

### 1. Type index:

#### 1.1. Complete filter: (ordering example)

**LF. 101. 10VG. 16. E. P. -. UG. 5. -. AE**

1	2	3	4	5	6	7	8	9	10	11
---	---	---	---	---	---	---	---	---	----	----

- 1 **series:**  
LF = in-line filter
- 2 **nominal size:** 101
- 3 **filter-material and filter-fineness:**  
80 G = 80  $\mu\text{m}$ , 40 G = 40  $\mu\text{m}$ , 25 G = 25  $\mu\text{m}$   
stainless steel wire mesh  
25 VG = 20  $\mu\text{m}_{(c)}$ , 16 VG = 15  $\mu\text{m}_{(c)}$ , 10 VG = 10  $\mu\text{m}_{(c)}$ ,  
6 VG = 7  $\mu\text{m}_{(c)}$ , 3 VG = 5  $\mu\text{m}_{(c)}$  Interpor fleece (glass fiber)
- 4 **resistance of pressure difference for filter element:**  
16 =  $\Delta p$  232 PSI
- 5 **filter element design:**  
E = single-end open  
S = with by-pass valve  $\Delta p$  29 PSI  
S1 = with by-pass valve  $\Delta p$  51 PSI
- 6 **sealing material:**  
P = Nitrile (NBR)  
V = Viton (FPM)
- 7 **filter element specification:** (see catalog)  
- = standard  
VA = stainless steel  
IS06 = see sheet-no. 31601  
IS07 = see sheet-no. 31602
- 8 **connection:**  
UG = thread connection
- 9 **connection size:**  
5 = -16 SAE
- 10 **filter housing specification:** (see catalog)  
- = standard  
IS06 = see sheet-no. 31605
- 11 **clogging indicator or clogging sensor:**  
- = without  
AE = visual-electrical, see sheet-no. 1609  
OP = visual, see sheet-no. 1628  
OE = visual-electrical, see sheet-no. 1628  
VS1 = electrical, see sheet-no. 1607  
VS2 = electrical, see sheet-no. 1608

#### 1.2. Filter element: (ordering example)

**01N. 100. 10VG. 16. E. P. -**

1	2	3	4	5	6	7
---	---	---	---	---	---	---

- 1 **series:**  
01N. = filter element according to company standard
- 2 **nominal size:** 100
- 3 - 7 see type index-complete filter

weight: 8.0 lbs.

Changes of measures and design are subject to alteration

EDV 08/12

Friedensstrasse 41, 68804 Altlussheim, Germany

phone +49 (0)6205 2094-0

e-mail info-internormen@eaton.com

fax +49 (0)6205 2094-40

url [www.eaton.com/filtration](http://www.eaton.com/filtration)

## 2. Spare parts:

item	qty.	designation	dimension	article-no.	
1	1	filter element	01N. 100		
2	1	O-ring	32 x 3,5	304378 (NBR)	304401 (FPM)
3	1	O-ring	76 x 4	305599 (NBR)	310291 (FPM)
4	2	screw plug	BSPP ¼	305003	
5	2	screw plug	BSPP ½	304678	
6	1	clogging indicator, visual	OP	see sheet-no. 1628	
7	1	clogging indicator, visual-electrical	OE	see sheet-no. 1628	
8	1	clogging indicator, visual-electrical	AE	see sheet-no. 1609	
9	1	clogging sensor, electrical	VS1	see sheet-no. 1607	
10	1	clogging sensor, electrical	VS2	see sheet-no. 1608	
11	2	O-ring	14 x 2	304342 (NBR)	304722 (FPM)
12	2	screw plug	BSPP ¼	305003	

item 12 execution only without clogging indicator or clogging sensor

## 3. Description:

In-line filters of the type LF 101 are suitable for a working pressure up to 464 PSI.

Pressure peaks are absorbed with a sufficient margin of safety.

The filter is mounted in such a way that inlet and outlet are on the same level. It can be used as suction filter, pressure filter and return-line filter. The filter element consist of star-shaped, pleated filter material which is supported on the inside by a perforated core tube and is bonded to the end caps with a high-quality adhesive. The flow direction is from outside to the inside.

To clean (see special leaflets 21070-4 and 34448-4) and change respectively the filter element, the filter cover will be removed and the filter element can be taken out.

Filter finer than 40 µm should use throw-away elements made of Interpor fleece (glass fibre). Filter elements as fine as 5 µm<sub>(c)</sub> are available; finer filter elements on request.

Internormen Product Line filter elements are known as elements with a high intrinsic stability and an excellent filtration capability, a high dirt-retaining capacity and a long service life.

Internormen Product Line filter are suitable for all petroleum based fluids, HW-emulsions, most synthetic hydraulic fluids and lubrication oils

Approvals according to TÜV, and the major „Shipyard Classification Societies“ D.N.V.; B.V.; G.L.; L.R.S.; R.I.N.A.; A.B.S. and others are possible.


## 4. Technical data:

temperature range:	+14°F to +176°F (for a short time +212°F)
operating medium:	mineral oil, other media on request
max. operating pressure:	464 PSI
test pressure:	900 PSI
connection system:	thread connection
housing material:	aluminium-cast
sealing material:	Nitrile (NBR) or Viton (FPM), other materials on request
installation position:	vertical
mini-measuring connection:	BSPP ¼
evacuation-or bleeder-connection:	BSPP ½
volume tank:	.26 Gal

Classified under the Pressure Equipment Directive 97/23/EC for mineral oil (fluid group 2), Article 3, Para. 3.

Classified under ATEX Directive 94/9/EC according to specific application (see questionnaire sheet-no. 34279-4).

## 5. Symbols:

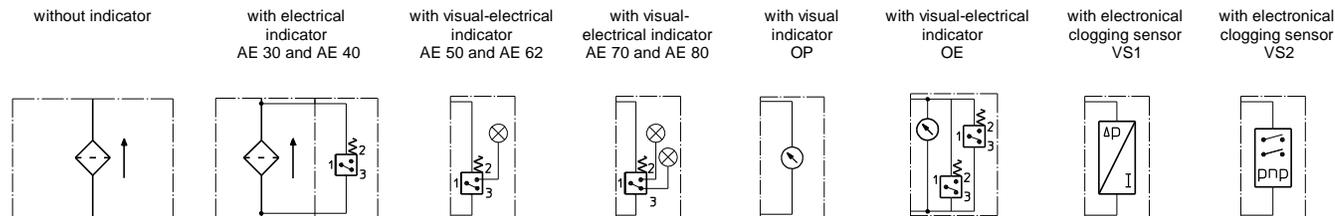

**6. Pressure drop flow curves:** Precise flow rates see 'Interactive Product Specifier', respectively  $\Delta p$ -curves ; depending on filter fineness and viscosity.

## 7. Test methods:

Filter elements are tested according to the following ISO standards:

ISO 2941	Verification of collapse/burst resistance
ISO 2942	Verification of fabrication integrity
ISO 2943	Verification of material compatibility with fluids
ISO 3723	Method for end load test
ISO 3724	Verification of flow fatigue characteristics
ISO 3968	Evaluation of pressure drop versus flow characteristics
ISO 16889	Multi-pass method for evaluating filtration performance