

4

3

2

1

D

D

C





C

B

B

A

A

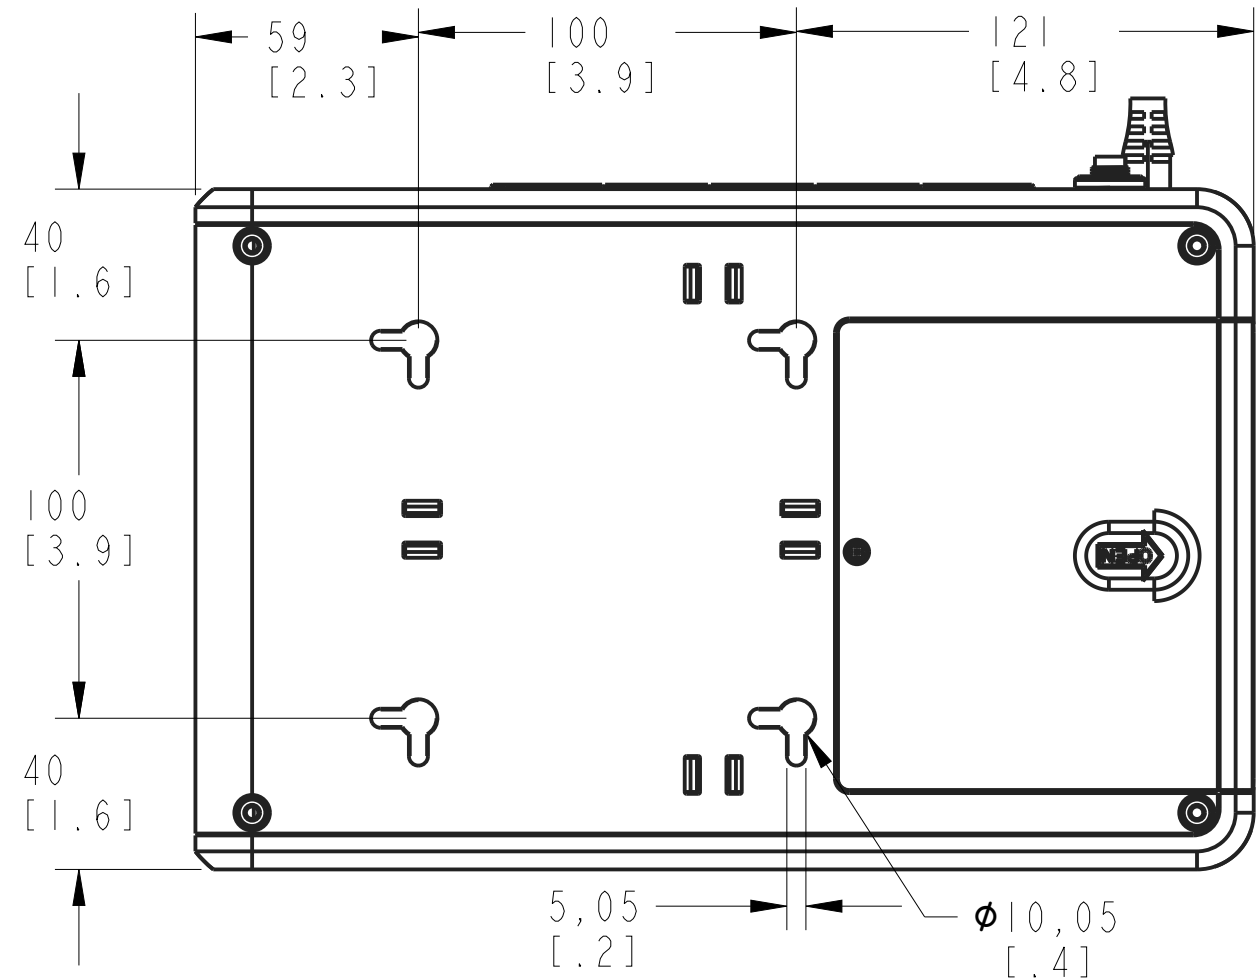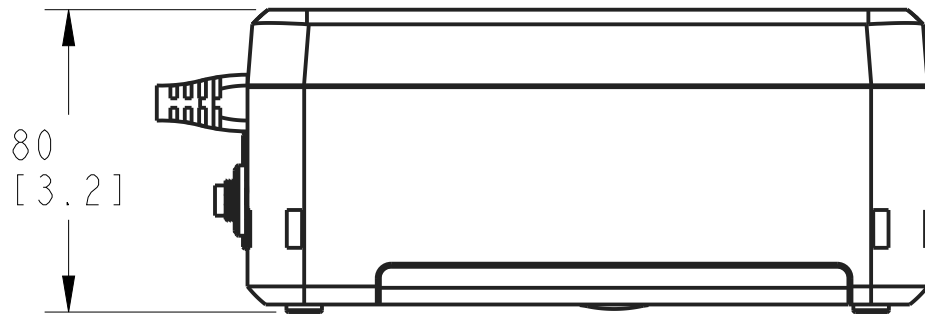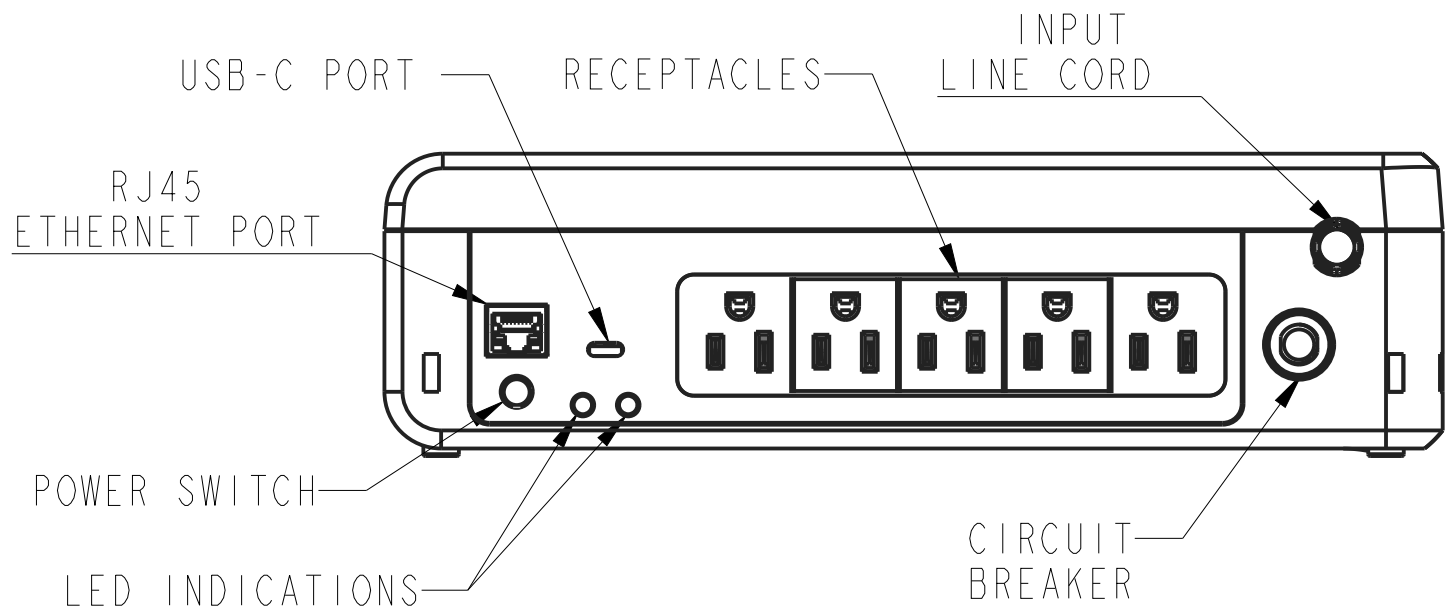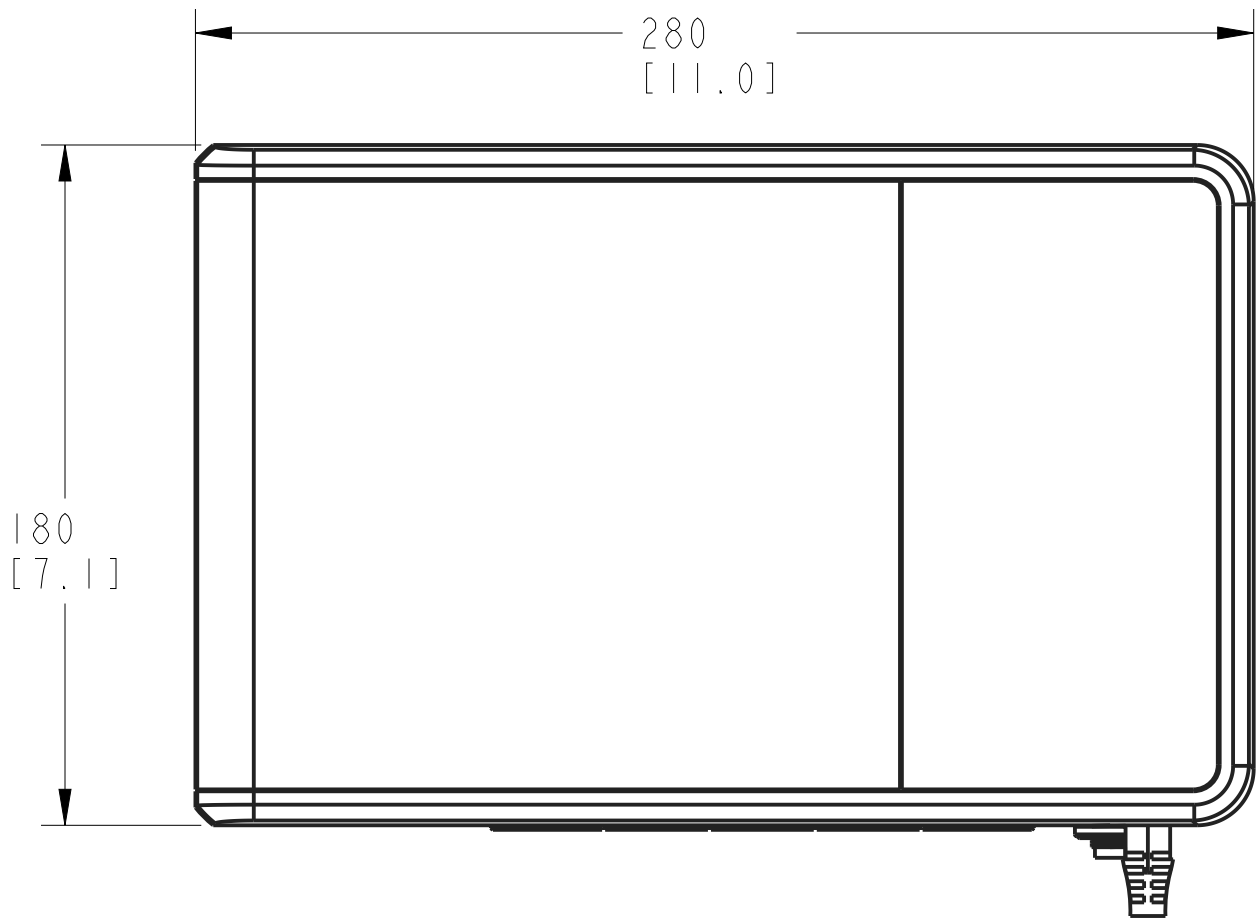

BC850RNC SPECIFICATIONS

1	FUNCTIONALITY	POWER PROTECTION
2	MECHANICAL	280 X 80 X 180 MM (11.0 X 3.2 X 7.1) INCH
3	UNIT WEIGHT	7 lbs
4	INPUT	RATED CURRENT : 7.1A NOMINAL VOLTAGE : 120V AC I/P CONNECTION TYPE: NEMA 5-15P CIRCUIT BREAKER: 10A INPUT CORD LENGTH: 5ft
5	OUTPUT	OUTPUT: 850 VA (450 WATTS) NOMINAL OUTPUT: 120V POWER FACTOR: 0.53 FREQUENCY: 50 / 60 Hz RECEPTACLE: 5 X NEMA 5-15R
6	BATTERY	TYPE: SEALED, MAINTENANCE FREE, LEAD ACID DC SYSTEM VOLTAGE: 12VDC BATTERY REPLACEMENT: REPLACABLE INTERNAL BATTERY
7	ENVIRONMENTAL	OPERATING TEMPERATURE RANGE: 32° to 122°F (0° to 50°C) STORAGE TEMPERATURE RANGE: 5° to 122°F (-15° to 50°C)
8	CERTIFICATIONS & COMPLIANCES	CSA C22.2 NO. 107.3 (CAN); UL1778 (US) ; NOM (Mexico) Energy Star; ROHS; FCC Class B, DOE, CEC

METRIC	THIRD ANGLE PROJECTION	NAME (PART NUMBER): 913333	REVISION: A	EATON
DESCRIPTION: SUBMITTAL DWG, BC850RNC				
ORIGINATED BY: AMIT J	10-MAY-24	SEE NOTES FOR TOLERANCES DIM ARE IN MM (INCHES) AFTER PLATING INTERPRET DIM AND TOL PER ASME Y14.5-2018	STATE: RELEASED	SCALE: 0.500
MODIFIED BY: -	-	-	ECO: -	SHEET: 1 OF 1
EATON CORPORATION - CONFIDENTIAL AND PROPRIETARY - NOTICE TO PERSONS RECEIVING THIS DOCUMENT AND/OR TECHNICAL INFORMATION: THIS DOCUMENT, INCLUDING THE DRAWING AND INFORMATION CONTAINED THEREIN, IS THE PROPERTY OF EATON CORPORATION, AND IS LOANED TO YOU AND SUBJECT TO RETURN BY EATON AT ANY TIME. BY ACCEPTING THIS DOCUMENT, THE RECIPIENT AGREES TO HOLD EATON HARMLESS FROM ANY AND ALL CLAIMS, DAMAGES, LOSSES, AND EXPENSES, INCLUDING REASONABLE ATTORNEY'S FEES, THAT MAY BE ASSERTED AGAINST EATON BY ANY THIRD PARTY, INCLUDING EATON'S EMPLOYEES, AGENTS, OR CONTRACTORS, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THIS DOCUMENT. THIS NOTICE SHALL SURVIVE THE STATUS OF THIS DOCUMENT. © 2024 Eaton Corporation - All Rights Reserved.				

4

3

2

1