00–>01 ECO-059156
Update for Production

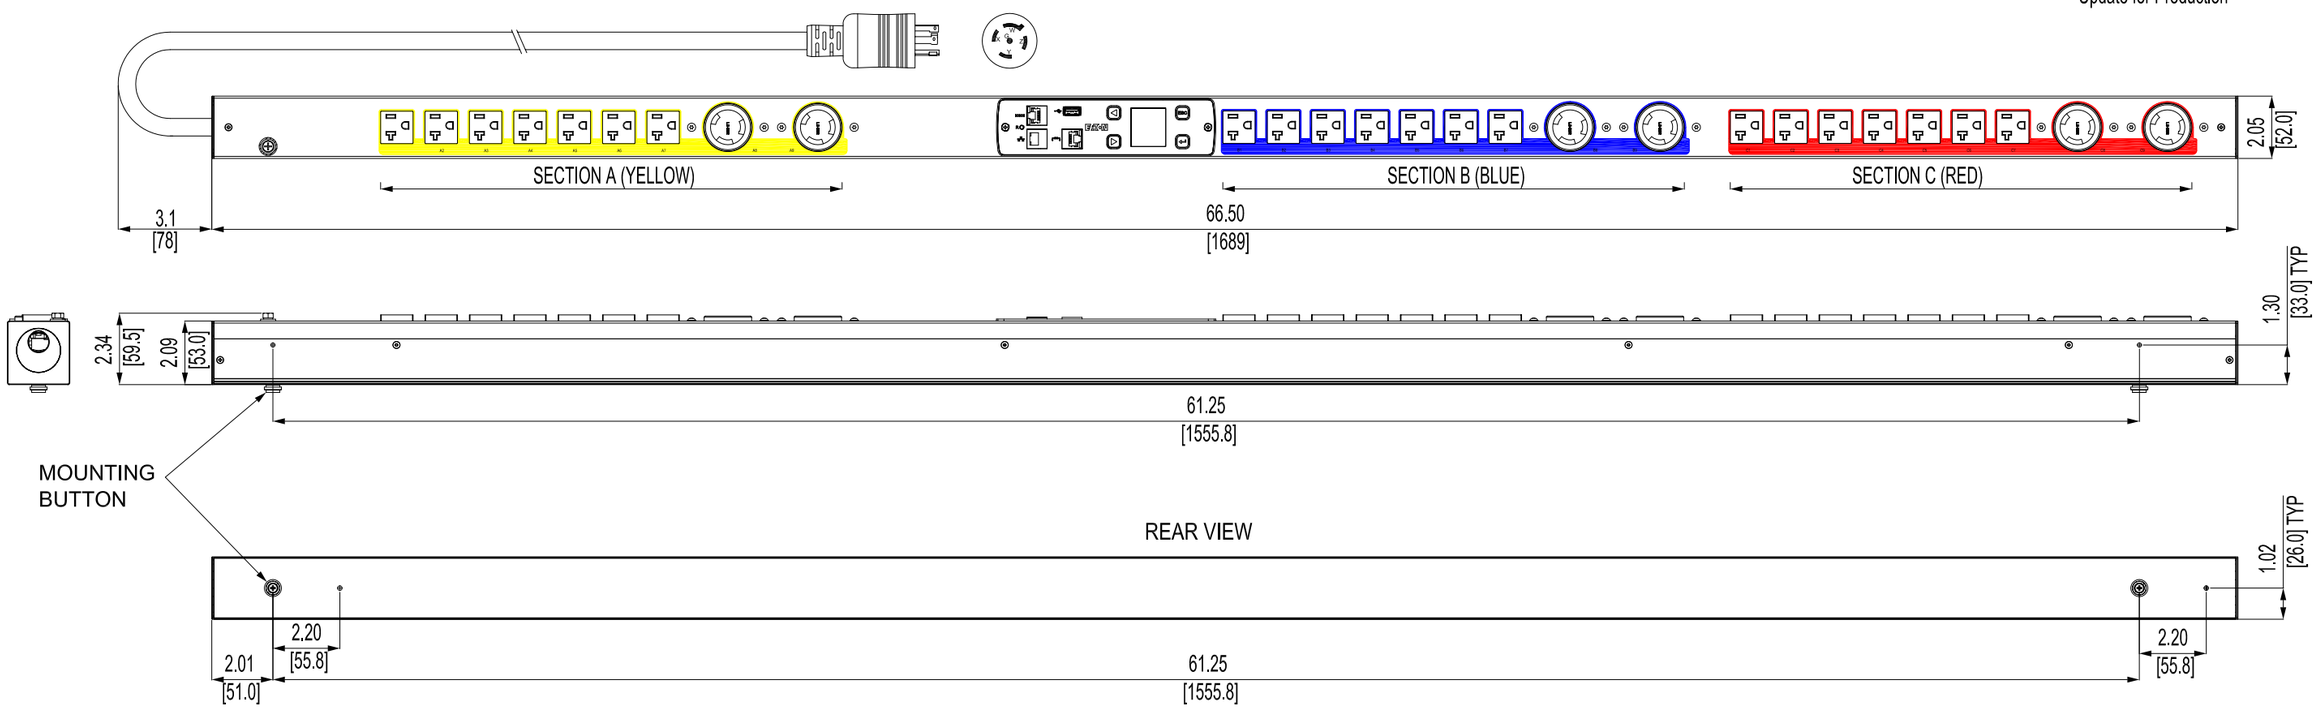

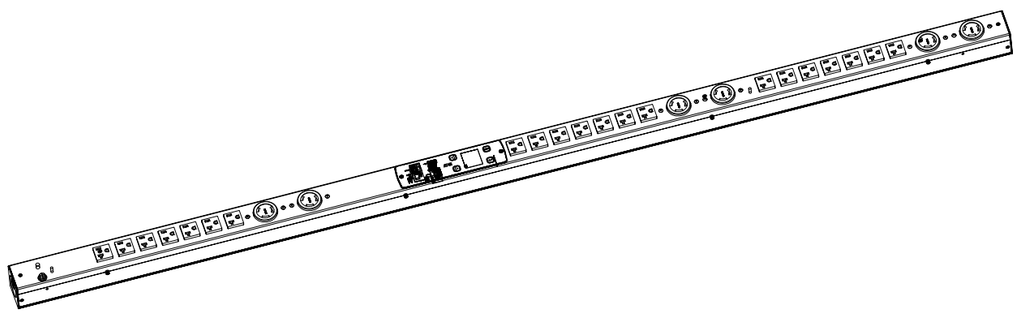

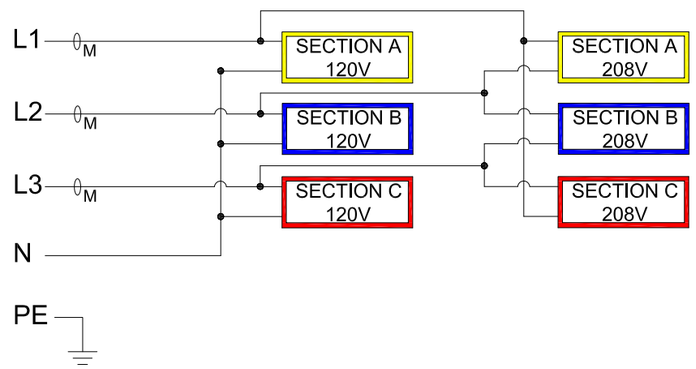

EMI308-10
G3 METERED INPUT

FUNCTIONALITY	INPUT	OUTPUT	OPERATING TEMPERATURE
CURRENT, POWER, AND ENERGY METERING FOR INPUT AND BRANCH	NEMA L21-20P 10FT 12AWG / 5C POWERCORD	(21) NEMA 5-20R (6) NEMA L6-20R	32° TO 140° F 0° TO 60° C
MECHANICAL	**INPUT RATING**	**OUTPUT RATING**	**CERTIFICATIONS**
66.50" (1689mm) LENGTH 2.05" (52mm) WIDTH 2.09" (53mm) DEPTH ALUMINUM CHASSIS, BLACK	120/208V~ WYE 3W+N+PE 16A 50/60HZ	120V~; 16A PER 5-20 200-240V~; 16A PER L6-20 16A MAX PER SECTION 16A MAX PER PHASE	c UL us LISTED
CIRCUIT BREAKERS	**FILTER AND SPIKE/SURGE**	**ACCESSORIES**	**CONFIGURATION**
NONE	NONE	INCLUDED SPK012 - INSTALLATION INCLUDED SPK013 - NETWORK OPTIONAL EMP001 - ENVIRONMENTAL PROBE	EMI3PB15AFE78AC

TITLE	ePDU G3 SPECIFICATION EMI308-10		DRAW	Spock Liu 2013-11-20
			DESIGN	
DWG NO.	B9001-221290-01P		CHECKED	Elon Guo 2013-11-20
MATERIAL			SAFETY	
COATING			APPROVED	Vicky Shen 2013-11-20
UNITS	in[mm]	A3	SCALE 1:5	EATON ELECTRICAL SECTOR
SHEET	*/*			