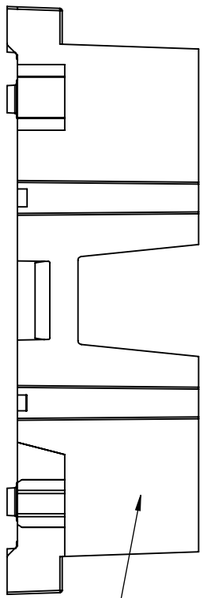

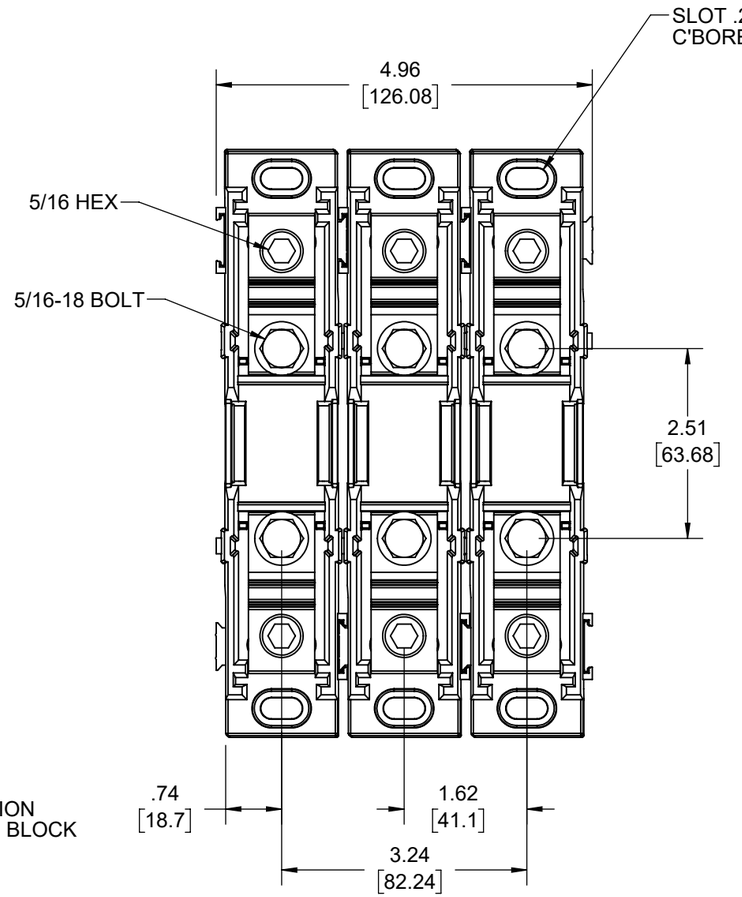

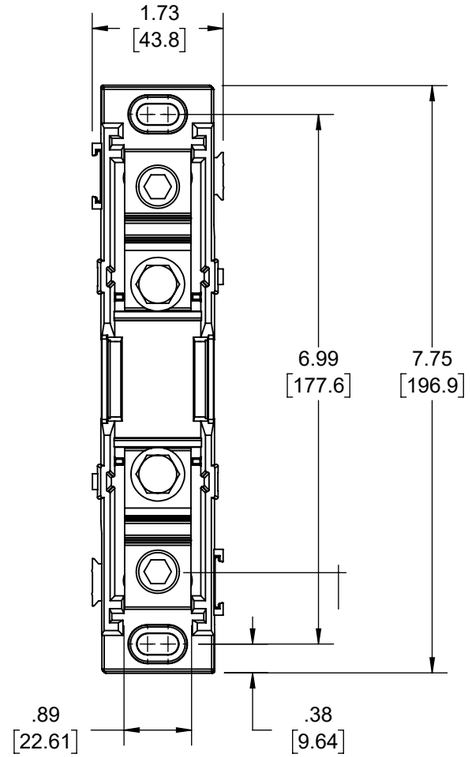

PRODUCT INFORMATION
PROVIDE ON SIDE OF BLOCK

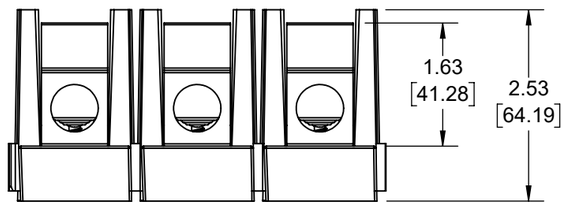

TM60200-3CR



TM60200-1CR

FOR APPROVAL

NAME: _____

SIGNATURE: _____

DATE: _____

CLASS T FUSEHOLDER
CAT. NO. TM60200-XCR
200A 600V

NOTES:

1. AGENCY INFORMATION:
   cULus FILE NO. E14853

2. MATERIAL:
   INSULATOR - HIGH IMPACT THERMOPLASTIC
   TEMP. RATINGS 125°C (257°F)
   CONNECTOR - PLATED ALUMINUM
   SET SCREWS - PLATED STEEL
   BOLT - PLATED STEEL
   WASHER - PLATED STEEL
   MOUNTING SCREW - PLATED STEEL

3. TERMINATION:
   250KCMIL-6 CU AL

4. RATINGS:
   MAXIMUM AMP PER POLE - 200A
   BASED ON NEC WIRE RATINGS CODE, 75°C

SCALE 1:2

DRAWING REVISION: A	REVISION BY: T. MINNICK	REV DATE/© DATE: 5/26/20
ECO: ECO-0183923	APPROVED BY	DATE
ECO DESCRIPTION: AS RELEASED		

COPYRIGHT (PER REVISION DATE) REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED. PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF REGAL BELOIT AMERICA, INC. ("OWNER") AND CONTAINS OWNER'S PROPRIETARY INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED, BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.

TOLERANCES (EXCEPT AS NOTED):

DEC.	INCH	mm	ANGLE
.X	±0.1	[±3]	±7' 30"
.XX	±0.03	[±0.8]	
.XXX	±0.015	[±0.38]	
.XXXX	±0.0005	[±0.013]	

REMOVE BURRS & BREAK SHARP EDGES: .003/.015 [.08/.38] X 45°
CORNER FILLETS: R.02 [.5]
MACHINED SURFACES: 200 / 5.1 / INCH / mm
mm DIMENSIONS IN [BRACKETS] ARE FOR REFERENCE ONLY

DRAWN BY: T. MINNICK	EATON BUSSMANN SERIES	
DATE: 5/26/20	DESCRIPTION: TM60200-XCR	
APPROVED BY		
DATE		
REFERENCE	MATERIAL	PROCESS/FINISH
	SIZE: B / DRAWING NUMBER: 725X500	SHEET: 2 OF 2