




Semiconductor Fuse

2-30A, 1500/1250/2000 Volts

BIF Document
35785109
 Size **20x127**



Bussmann

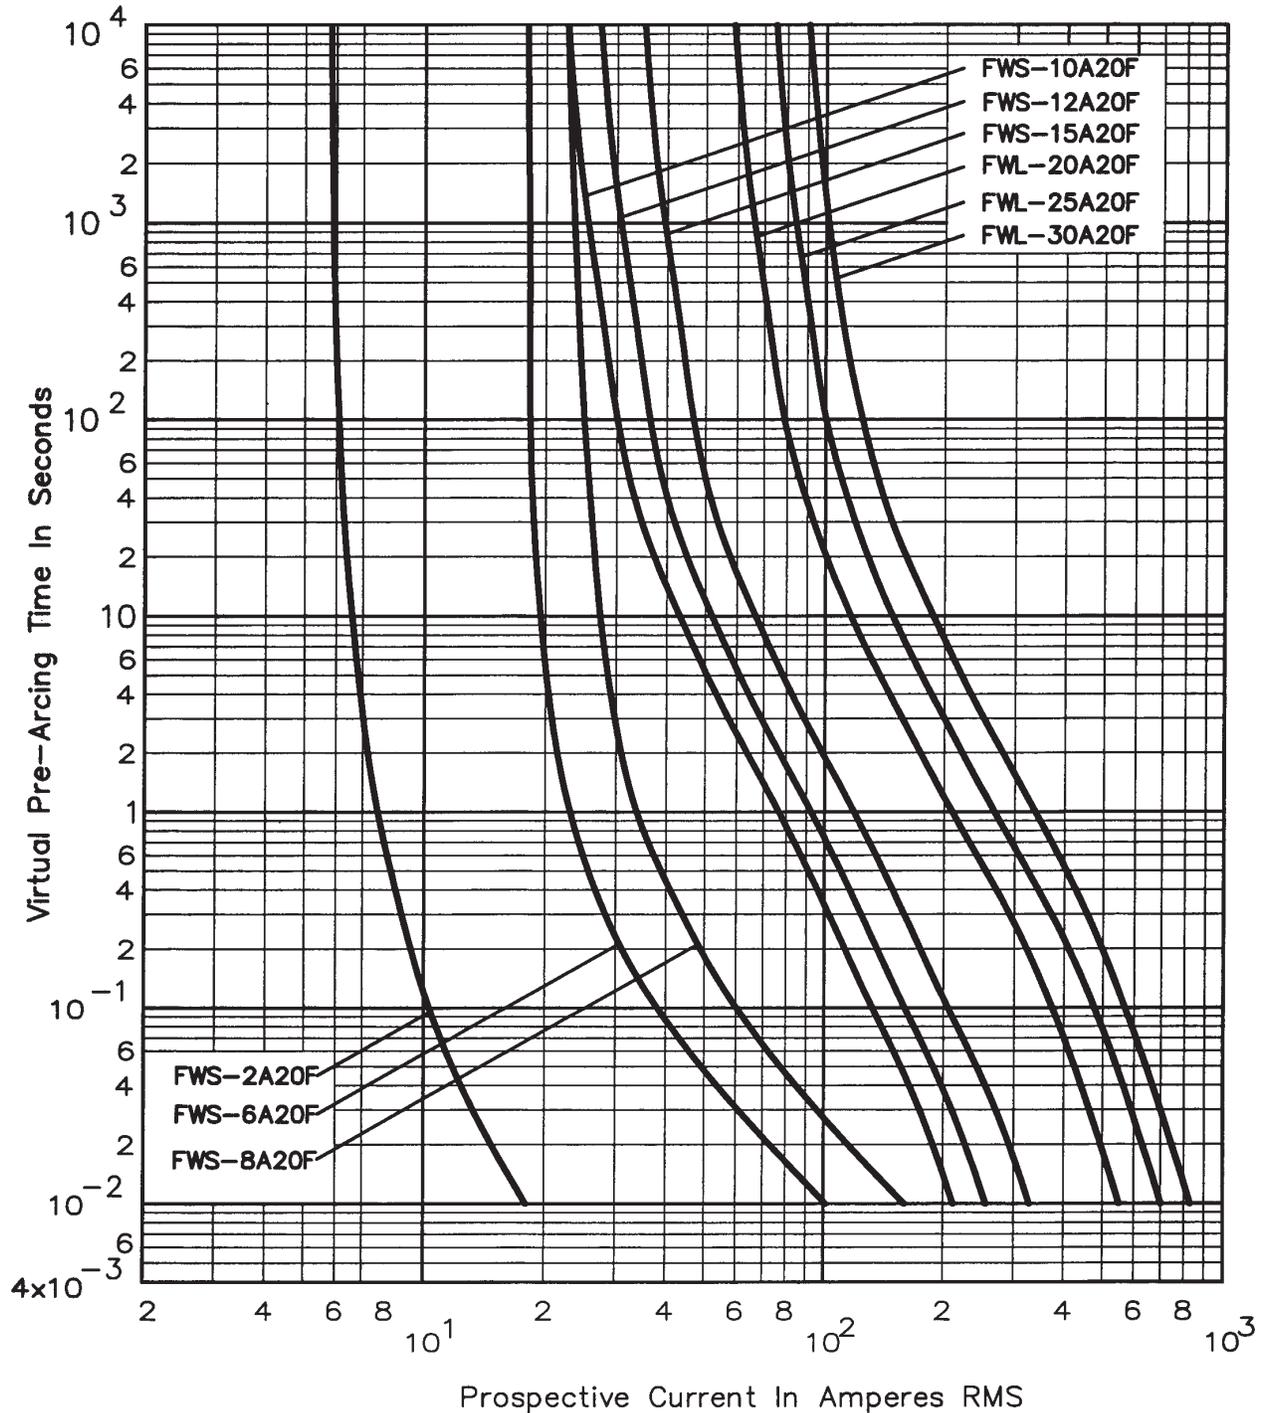

Minimum Melting Time-Current Characteristic Curves
FWS 2A20F-15A20F FWL 20A2F-30A20F

Approved: **NN** Page **1 of 1**
 Rev. Date: **SEPT-97** Pub. Date: **JAN-98**

COOPER Bussmann
 7-18-01 SB01191

BUSSMANN
 P.O. Box 14460
 St. Louis, MO 63178-4460
 U.S.A.
 Phone: 314-394-2877
 Fax: 800-544-2570
 Int'l Fax: 314-527-1413

BUSSMANN U.K.
 Burton-on-the-Wolds
 Leicestershire LE12 5TH
 England
 Phone: 44-1509-882737
 Fax: 44-1509-882786

BUSSMANN
 DENMARK
 5 Literbuen
 DK-2740 Skovlunde
 Copenhagen, Denmark
 Phone: 45-4485-0900
 Fax: 45-4485-0901

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.