

**Depth Filtration**  
**BECO PROTECT® PB**

**Depth Filter Cartridges**

BECO PROTECT PB depth filter cartridges consist of thermally bonded, melt-blown polypropylene filter material that gives them a high chemical resistance and added dirt holding capacities.

The physical strength of the BECO PROTECT PB depth filter cartridges is such that no cages and cores are required. They are available with retention ratings between 0.5 µm and 100 µm, and are ideal for meeting the coarse pre-filtration requirements of process water in the food industry.

**Features and Benefits**

- High dirt holding capacity
- Low differential pressure
- High chemical resistance
- Pressure surge resistance
- Long service life

**Configuration**

BECO PROTECT PB depth filter cartridges are made from high-quality, melt-blown polypropylene micro-fibers and have a broad chemical compatibility. All materials used ensure product-neutral filtration without adsorption or particle migration.



**Materials**

<b>Filter material:</b>	Polypropylene micro-fibers
<b>End caps:</b>	Polyethylene

All materials used meet the FDA requirements according to 21 CFR § 177.1520.


**Technical Data**

Nominal length for Code F, X	
9 = 9 ¾"	(248 mm)
1 = 10"	(254 mm)
7 = 19 ½"	(500 mm)
2 = 20"	(508 mm)
8 = 29 ½"	(750 mm)
3 = 30"	(762 mm)
6 = 39"	(992 mm)
4 = 40"	(1016 mm)

<b>Diameter:</b>	2.48 in (63 mm)
<b>Inside diameter:</b>	1.18 in (28 mm)
<b>Maximum operating temperature:</b>	149 °F (65 °C)
<b>Maximum differential pressure in flow direction:</b>	46.4 psid (320 kPa, 3.2 bar) at 68 °F (20 °C) 17.4 psid (120 kPa, 1.2 bar) at 140 °F (60 °C)

**Flow Rate**

10" with water at 68 °F (20 °C) (standard values)

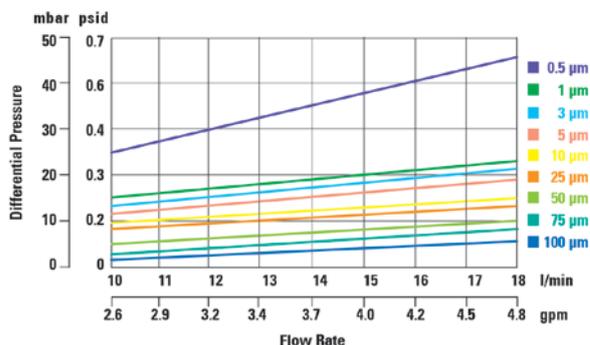


**Filter Cartridges Types/Nominal Retention Ratings**

Type	Retention rating (µm)	Type	Retention rating (µm)
PB005	0.5	PB250	25.0
PB010	1.0	PB500	50.0
PB030	3.0	PB750	75.0
PB050	5.0	PB999	100.0
PB100	10.0		

**Adapter Codes**

Code F	Code X
Double open end (DOE) with two flat gaskets	Double open end (DOE) without end caps

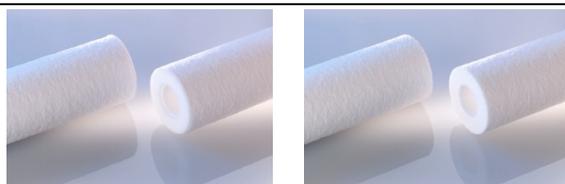

## Ordering Information

BECO PROTECT PB depth filter cartridges with protective foil in carton.

Type	Retention rating	Adapter	Nominal length	Packaging unit
PB	005 = 0.5 µm	F = Code F (DOE), with PE gasket	1 = 10" (250 mm)	6
	010 = 1.0 µm	X = Code X (DOE), without end caps	2 = 20" (500 mm)	
	030 = 3.0 µm		3 = 30" (750 mm)	
	050 = 5.0 µm		4 = 40" (1000 mm)	
	100 = 10.0 µm			
	250 = 25.0 µm			
	500 = 50.0 µm			
	750 = 75.0 µm			
	999 = 100.0 µm			

### Example

PB	005	F	1	6
----	-----	---	---	---

BECO PROTECT PB depth filter cartridges; 0.5 µm retention rating; Code F, 10" (250 mm)

### Safety

When used as directed and handled correctly, there are no known unfavorable effects associated with this product. BECO PROTECT PB depth filter cartridges do not require the provision of safety-relevant information.

Storage, handling and transport do not present any environmental and health risks.

### Disposal

BECO PROTECT PB depth filter cartridges should be treated as industrial waste. Any local and other official regulations in relation to the filtered product must be followed.

### Storage

Store filter cartridges in their original packaging and in a dry, odor-free and UV ray protected place.

Use filter cartridges within 60 months after production date.

### Certified Quality

During the production process, BECO PROTECT PB depth filter cartridges are regularly monitored to ensure consistent excellent quality control.

**North America**  
44 Apple Street  
Tinton Falls, NJ 07724  
Toll Free: 800 656-3344  
(North America only)  
Tel: +1 732 212-4700

**Europe/Africa/Middle East**  
Auf der Heide 2  
53947 Nettersheim, Germany  
Tel: +49 2486 809-0

Friedensstraße 41  
68804 Altlußheim, Germany  
Tel: +49 6205 2094-0

An den Nahewiesen 24  
55450 Langenlonsheim, Germany  
Tel: +49 6704 204-0

**China**  
No. 3, Lane 280,  
Linhong Road  
Changning District, 200335  
Shanghai, P.R. China  
Tel: +86 21 5200-0099

**Singapore**  
4 Loyang Lane #04-01/02  
Singapore 508914  
Tel: +65 6825-1668

**Brazil**  
Rua Clark, 2061 - Macuco  
13279-400 - Valinhos, Brazil  
Tel: +55 11 3616-8400

**For more information, please  
email us at [filtration@eaton.com](mailto:filtration@eaton.com)  
or visit [www.eaton.com/filtration](http://www.eaton.com/filtration)**

EN  
1 A 4.3.8  
12-2016

© 2016 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.