

FUSE MADE UP OF 2
SMALLER UNITS OF EQUAL
RATINGS IN A PARALLEL
MOUNTING (2.0 DIA. FUSES)




TIME-CURRENT CHARACTERISTIC CURVES

MINIMUM MELT
8.3, 15.5, 23.0 KV X-LIMITER FULL RANGE PARALLEL MOUNTED FUSE

DRAWN BY ALJ CHK'D BY *[Signature]*
DATE 3/24/97 DATE 3/27/97
REPLACES 08/93 REV 01 REQ NO.
DWG NO. TCC305 M 00

Tests made at LOW Volts ac at HIGH pf at 25°C with no initial load
Standards used as basis for data: ANSI C37.47-1981 (R1992)
MINIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE PLUS
THIS DRAWING WAS PRODUCED ON A CAD SYSTEM. ANY MANUAL REVISION WILL VOID IT

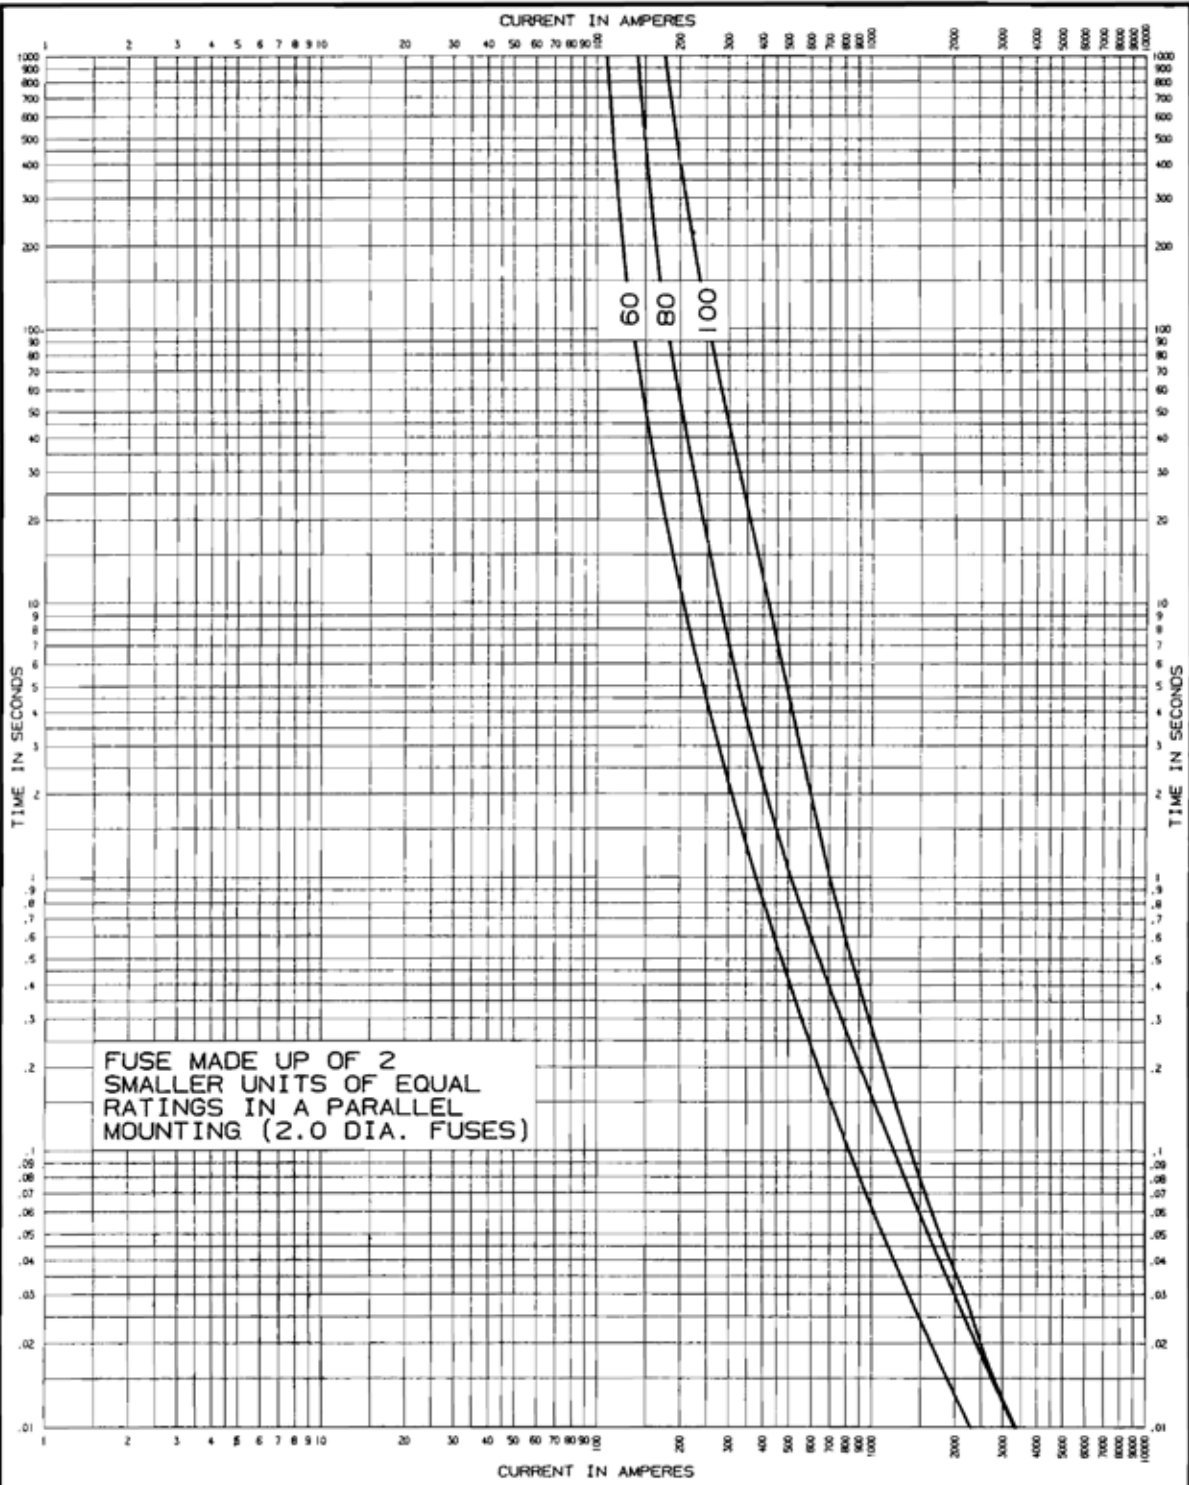

TIME-CURRENT CHARACTERISTIC CURVES

MAXIMUM CLEAR

8.3, 15.5, 23.0 KV X-LIMITER FULL RANGE PARALLEL MOUNTED FUSE

DRAWN BY ALJ CHK'D *[Signature]*
 DATE 3/24/97 DATE 3/27/97
 REPLACES 03/93 REV 01 REQ NO.

Tests made at RATED Volts ac at LOW pf at 25°C with no initial load
 Standards used as basis for data: ANSI C37.47-1981 (R1992)

MAXIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE MINUS

DWG NO. TCC305 C 00

THIS DRAWING WAS PRODUCED ON A CAD SYSTEM, ANY MANUAL REVISION WILL VOID IT.